A17.74-00E
WESTINGHOUSE
IS-YD-821B
08/15/86

S01062P V1/1 Cl
IS-YD-821
01/15/77

E.12

DMSP DATA SPECIFICATIONS

IS-YD-821

15 OCTOBER 1975

INCLUDING:

CHANGE B — 15 JANUARY 1977

Prepared By

DEFENSE METEOROLOGICAL SATELLITE PROGRAM
HEADQUARTERS SPACE AND MISSILE SYSTEMS ORGANIZATION
AIR FORCE SYSTEMS COMMAND
UNITED STATES AIR FORCE
Los Angeles, California 90009

SPECIFICATION CHANGE NOTICE
(See MIL-STD-490 For Instructions)

DATE: 07 March 1991

ORIGINATOR NAME AND ADDRESS: Westinghouse Electric Corp. P. O. Box 746 · MS 450 Baltimore, MD 21203	2. ☐ PROPOSED ☒ APPROVED	3. CODE IDENT. 97942	4. SPEC. NO. IS-YD-821B
		5. CODE IDENT. 97942	6. SCN NO. 011

7. SYSTEM DESIGNATOR DMSP	8. RELATED ECP NO. 037	9. CONTRACT NO. F04701-88-C-0118	10. CONTRACTUAL AUTHORITY PO0020

11. CONFIGURATION ITEM NOMENCLATURE Operational Linescan System	12. EFFECTIVITY · OLS 7, OLS 12 and up, S/N 5002, S/N 5007 and up

This notice informs recipients that the specification identified by the number (and revision letter) shown in Block 4 has been changed. The pages changed by this SCN being those furnished herewith and carrying the same date as this SCN. The pages of the page numbers and dates listed below in the summary of changed pages, combined with non-listed pages of the original issue of the revision shown in Block 4, constitute the current version of this specification.

13. SCN NO.	14. PAGES CHANGED (INDICATE DELETIONS)	S	A	15. DATE (APPROVED)
011	ii, v, vii, viii 1, 2, 3, 5, 6, 9, 10, 12 28, 29, 30, 32, 33, 33a, 34, 35, 36, 37 39, 40a, 41, 42, 43, 46, 47, 48	X x x X		5 NOV 91

SUMMARY OF CHANGED PAGES			
001 002 004 005 006 010 011	Pages vii and viii dated 7 MAR 1991 and transmitted herewith contain page numbers and dates of all pages of this specification that have been changed by approved SCNs and show the paragraphs affected by each SCN. The SCN approval dates are also shown. The date of apprpoval Is the earliest date of approval in instances where more than one contract is affected.		

16. TECHNICAL CONCURRENCE USAF/AFSC	DATE November 5, 1991

1696
FORM
1 DEC 68

* "S" indicates supersedes earlier page.
"A" indicates added page.

GRP12.r/l

SPECIFICATION CHANGE NOTICE
(See MIL-STD-490 For Instructions)

DATE: 09 March 1990

1. ORIGINATOR NAME AND ADDRESS: Westinghouse Electric Corp. P. O. Box 746 - MS 450 Baltimore, MD 21203	2. [ ] PROPOSED [X] APPROVED	3. CODE IDENT. 97942	4. SPEC. NO. IS-YD-821B
		5. CODE IDENT. 97942	6. SCN NO. 010

7. SYSTEM DESIGNATOR DMSP	8. RELATED ECP NO. 0035C1	9. CONTRACT NO. F04701-83-C-0118	10. CONTRACTUAL AUTHORITY PO0019

11. CONFIGURATION ITEM NOMENCLATURE Operational Linescan System	12. EFFECTIVITY OLS 7, S/N 5002 and up

This notice informs recipients that the specification identified by the number (and revision letter) shown in Block 4 has been changed. The page numbers listed below in the summary of changed pages, combined with non-listed pages of the orignial issue of the revision shown in Block 4, constitute the current version of this specification.

13. SCN NO.	14. PAGES CHANGED (INDICATE DELETIONS)	*S	*A	15. DATE (Approved)
010	i 33 53	x		11 JUN 91
	ii 33a 54	x		
	iii 34 55	x		
	iv 36 56	x		
	vii 40 57	x		
	viii 41 58	x		
	14a 46 59	x		
	16 49 62	x		
	22 50	x		
	24 51	x		
	31 51a	x		
	32 52	x		

	SUMMARY OF CHANGED PAGES			
001	Pages vii and viii dated 09 MAR 90 and trans-			
002	mitted herewith contain page numbers and dates			
004	of all pages of this specification that have			
005	been changed by SCNs and show the paragraphs			
006	affected by each SCN. The SCN approval dates are			
010	also shown. The date of approval is the earliest date of approval in instances where more than one contract is affected.			

16. TECHNICAL CONCURRENCE USAF/AFSC	DATE June 11, 1991

1696
FORM
1 DEC 68
r/2564M

* "S" indicates supersedes earlier page.
"A" indicates added page.

SPECIFICATION CHANGE NOTICE
(See MIL-STD-490 For Instructions)

DATE: **01** June 1989

ORIGINATOR NAME AND ADDRESS: Westinghouse Electric Corp. P. O. Box 1521- MS 3K26 Baltimore, MD 21203	2. ☐ PROPOSED ☒ APPROVED	3. CODE **IDENT.** 97942	4. SPEC. NO. IS-YD-821B
		5. CODE **IDENT.** 97942	6. SCN NO. 007

7. SYSTEM DESIGNATOR DMSP	8. RELATED ECP NO. 034	9. CONTRACT NO. **F04701-88-C-0118**	10. CONTRACTUAL AUTHORITY PO0022

11. CONFIGURATION ITEM **NOMENCLATURE** Operational **Linescan** System	12. EFFECTIVITY - **OLS** 17 and up, S/N 5012 and up

This notice informs recipients that the specification identified by the number (and revision letter) shown in Block 4 has been changed. The pages changed by this SCN being those furnished herewith and carrying the same date as this SCN. The pages of the page numbers and dates listed below in the summary of changed pages, combined with non-listed pages of the original issue of the revision shown in Block 4, constitute the current version of this specification.

13. SCN NO.	14. PAGES CHANGED (INDICATE DELETIONS)	*S	*A	15. DATE (APPROVED)
007	v	x		22 NOV 91
	vii	x		
	viii	x		
	20	x		
	21	x		
	27	x		
	38	x		
	39	x		
	43	x		

SUMMARY OF CHANGED PAGES

001	Pages vii and viii dated 1 JUN 1989 and transmitted
002	herewith contain page numbers and dates of all
004	pages of this specification that have been changed
005	by approved SCNs and show the paragraphs affected
006	by each SCN. The SCN approval dates are also
007	shown. The date of appproval is the earliest date
010	of approval in instances where more than one
011	contract is affected.

16. TECHNICAL CONCURRENCE   DATE

    USAF/AFSC   November 22, 1991

'ORM 1696
DEC 68

* **"S"** indicates supersedes earlier page.
  "A" indicates added page.

821sc7.wp/1

DATE: 08 August 1983

1. ORIGINATOR NAME: AND ADDRESS	12.	3. CODE IDENT.	4. SPEC. NO.
Westinghouse Electric Corp. P. O. Box 746 - US 450 Baltimore, MD 21203	[ ] PROPOSED [X] APPROVED	97942	IS-YD-8218
		5. CODE IDENT. I 97942	6. SCN NO. I 004

7. SYSTEM DESIGNATOR	8. RELATED EC? NO.	9. CONTRACT NO.	110. CONTRACTUAL AUTHORITY
DMSP	009	F04701-83-C-0048	P00004

11. CONFIGURATION ITEM NOMENCLATURE	112. EFFECTIVITY
Operational Linescan System	OLS-13 thru 16. S/N 5008 thru 5011

This notice informs recipients that the specification identified by the number (and revision letter) shown in Block 4 has been changed. The pages changed by this SCN being those furnished herewith and carrying the same date as this SCN. The pages of the page numbers and dates listed below in the summary of changed pages, combined with non-listed pages of the orignial issue of the revision shown in Block 4, constitute the current version of this specification.

13. SCN NO.	114. PAGES CHANGED (INDICATE DELETIONS)	* S	* A	15. DATE
004	vii	x		06 AUG 85
	viii	x		
	31	x		
	62	x		

	SUMMARY OF CHANGED PAGES			
001 and 005	Pages vii and viii dated 8 AUG 83 and transmitted) herewith contain page numbers and dates of all pages of this specification that have been changed by approved SCNs and show the paragraphs affected by each SCN. The SCN approval dates are also shown. The date of approval is the earliest date of approval in instances where more than one contract is affected.			

16. TECHNICAL CONCURRENCE   DATE

M. J. Spangler, Mgr. DMSP-Block 5 Programs   2/19/86

DD FORM 1696
1 DEC 68

* "S" indicates supersedes earlier page.
"A" indicates added page.

e/0161C

TABLE OF CONTENTS

TABLE OF CONTENTS (Cont'd)

GRP12.r/2

TABLE OF CONTENTS (Cont'd)

r/2564M

TABLE OF CONTENTS (Cont'd)

LIST OF FIGURES

GRP12.r/3

SCN NO.	SCN DATE	PARAGRAPHS AFFECTED	DATE APPROVED
001	05 NOV 80	4.1.1.1.6, 4.1.1.3.2, 4.1.1.6.2, 4.1.1.6.5, 4.1.1.6.6 (3), 4.1.2.1.3, 4.1.2.1.4, 4.1.2.1.7, 4.1.2.3.2, 4.1.2.3.3, 4.1.2.6.3, 4.1.2.6.5, 4.1.2.6, 4.1.2.6.6, 4.1.2.6.2, 4.1.2.6.6 (3), 4.1.2.7.1, 4.1.3.1.4, 4.1.3.1.7, 4.1.3.3, 4.1.3.3.3, 4.1.3.5, 4.1.3.5.3, 4.1.3.5.3, 4.1.3.7.3, Figures 3, 9, 15, 18, 26, 28, 30	06 AUG 81
002	01 APR 87	1.2, 3.2, 3.4, 4.1.1.5, 4.1.2.5	
003	14 APR 83	Figures 1, 5, 8, 17 Rejected	08 MAR 88
004	08 AUG 83	4.1.2.1.3, 4.1.3.7.3	07 AUG 85
005	01 NOV 83	4.1.1.6.6 (6), 4.1.2.6.6 (6),	27 JULY 84
006	15 APR 87	4.1.1.6.6 Figures 9 and (3), 18 4.1.2.6.6 (3) Figures 10, 11, 19, 20	08 MAR 88
007	01 JUN 89	List of Figures, Figure 9, Figure 9a (added), 4.1.1.6.6(6), Figure 18, Figure 18a (added), 4.1.2.6.6(6).	Pending
008	01 SEP 89	Withdrawn	
009	19 SEP 89	Disapproved	
010	09 MAR 90	Table of Contents, 4.1.1.1.6, 4.1.1.3.2, 4.1.1.6.2, 4.1.2.1.7, 4.1.1.6.6, 4.1.2.3.2, 4.1.2.1.3, Figure 14, 4.1.2.1.4, 4.1.2.3.3, 4.1.2.6.5, 4.1.2.6.1, 4.1.2.7.1, 4.1.2.6.2, 4.1.3.1, 4.1.2.6.4, 23, Figure 4.1.3.1.2, 4.1.3.1.3, 4.1.3.1.5, 4.1.3.1.7, Figure 24B, Figure 25, Figure 26, 4.1.3.3.3, 4.1.3.3.4, 4.1.3.5.4, 4.1.3.5.3, 4.1.3.7.3 Figure 27, Figure 28,	11 JUN 91
011	07 MAR 91	Table of Contents, List of Figures, 1.1, 1.2, 4.1.2, Figure 4.1.2.1, 1, Figure Figure 3, 2.0, 12-16, 3.1, 3.4, 4.0, 4.1, 4.1.2.1.3.2, 4.1.2.1.3.3, 4.1.2.1.4, 4.1.2.1.6, 4.1.2.1.7, 4.1.2.2, Figure 18, 4.1.2.6, 4.1.2.6.4, 4.1.2.6.5, 4.1.2.6.6, 4.1.2.7, Figure 21-22	05 NOV 91
012	15 OCT 91	Table of Contents, List of Figures, 4.1.2.1.3, 4.1.2.1.3.1, 4.1.2.1.3.2, 4.1.2.1.3.3, 4.1.2.1.4, 4.1.2.1.7, Figure 13 & 14a, 4.1.3.7.2, 4.1.3.7.3, 4.1.3.7.4, 4.1.3.7.5. Figure 30	Pending

GRP12.r/4

EFFECTIVE PAGES

PAGE	DATE	PAGE	DATE	PAGE	DATE
Cover	15 Jan 77	47	07 Mar 91		
I i	09 Mar 90	48	07 Mar 91		
ii	07 Mar 91	49-59	09 Mar 90		
iii	09 Mar 90	60-61	15 Jan 77		
iv	09 Mar 90	62	09 Mar 90		
		63	05 Nov 80		
v vi	07 15 Mar Jan 91 77	64	15 Jan 77		
vii-viii	07 Mar 91				
1	07 Mar 91				
2	07 Mar 91				
3	07 Mar 91				
4	15 Jan 77				
5	07 Mar 91				
6	07 Mar 91				
7-8	15 Jan 77				
9-10	01 Apr 87				
11	15 Jan 77				
12	07 Mar 91				
13	15 Jan 77				
14	05 Nov 80				
14a	09 Mar 90				
15	01 Apr 87				
16	09 Mar 90				
17	15 Jan 77				
18	01 Apr 87				
19	15 Jan 77				
20	01 Apr 87				
21	01 Nov 83				
22	**09** Mar 90				
23	05 Nov 80				
24	09 Mar 90				
25-26	15 Apr 87				
27	01 Nov 83				
28	07 Mar 91				
29	07 Mar 91				
30	07 Mar 91				
31	09 Mar 90				
32-36	07 Mar 91				
37	07 Mar 91				
38	01 Apr 87				
39	07 Mar 91				
40	09 Mar 90				
40a	07 Mar 91				
41	07 Mar 91				
42	07 Mar 91				
43	07 Mar 91				
44-45	15 Apr 87				
46	07 Mar 91				

DMSP DATA SPECIFICATIONS

1.0   SCOPE

This document specifies the formats of the data that is received at the various interfaces within the system shown in Figure 1.

1.1   SATELLITE SYSTEM DESCRIPTION

The Block 5D sensor is an oscillating scanning radiometer which operates in two spectral intervals; visible and infrared. The sensor system will gather and output in real time or store (multi-orbit) day and night, visual and infrared data from earth scenes and provide such data, together with appropriate calibration, indexing, and other auxiliary signals, to the spacecraft for transmission to ground stations. The data will be collected, stored and transmitted in fine (F data) or smoothed (S data) resolution. **Onboard** pre-processing of the data by the sensor system provides for the various modes of data output. The sensor provides terminator coverage in both visual (**L** data) and thermal (T data) modes.

Fine resolution data will be collected continuously, day and night, by the infrared detector (TF data) and continuously, during daytime only, by the silicon diode detector (LF data). Fine resolution data will have a nominal linear resolution of 0.3 **nm.** Because of the quantity of data collected, it will not be possible to store or to transmit all of the fine resolution information and selective collection will be required. Storage capacity and transmission constraints limit the quantity of fine resolution data (LF or TF) which can be provided in the SDF (Stored Data, Fine) mode.

Data smoothing permits global coverage in both the infrared (TS) and visible (LS) spectrum to be stored on the primary tape recorders in the SDS (Stored Data Smoothed) mode and/or transmitted real time to remote mobile readout terminals in the **RDS** (Realtime Data Smoothed) mode. Smoothing is accomplished by electrically reducing the sensor resolution to 1.5 nm in the along scan direction, then digitally averaging five such 0.3 x 1.5 nm samples in the along track direction. A nominal linear resolution of 1.5 nm results. Additionally, a photomultiplier tube will allow collection of visible (LS) data under night-time conditions at 1.5 nm nominal linear resolution.

For direct transmission to remote readout terminals or transportable terminals (TRANSTERMS) and for fleet operations, the OLS provides real data (RTD) output combinations of TF and LS or LF and TS and Special data. The smooth data in the RTD mode has not been digitally smoothed, so that a smooth sample is 0.3 nm in the along track direction times 1.5 nm in the along scan direction.

The sensor also provides the data management functions to process, record and output data from up to 12 special meterological sensors.

1.2   <u>INTRODUCTION</u>

The Command Readout Stations (CRS), Site I and Site II, and the AFSCF's Hawaiian Tracking Station (HTS) are the primary recipients of the stored data streams. Data Stream S for SDS and SDF is as illustrated in this document. The data rate is 1.3312 megabits per second if one type of data (TF or LF) or 2.6624 megabits per second if the data is interleaved bit-by-bit (TF/LF or TS/LS). The DMSP Mux accepts either data rate and formats Equipment Status Telemetry data with the incoming stored data stream. This 3.072 megabits per second data stream is transmitted via a Communications Satellite link to Site III and FNOC for processing. At Site III the multiplexed and interleaved data stream is split into its component parts. EST and LS data are forwarded to Site V for telemetry analysis. All stored data is formatted for processing in AFGWC's computer complex.

Data stream R for RTD data is as illustrated in this document. The data rate is 1.024 megabits per second. RTD data is transmitted to the ground in the same direction as the data is collected. SDS and SDF data is transmitted to the ground reversed in direction from the direction which the data is collected due to storage on the satellite prior to transmission (the recorders do not rewind before playback). Remote Sites (TRANSTERMS) and Shipboard Terminals are capable of receiving the RTD data stream.

Data stream RDS is as illustrated in this document. The data rate is 133.1 kilobits per second (for OLS serial number 12 to 16) or 177.5 kilobits per second (for OLS serial number 17 and up). RDS data is identical in format to SDS data. RDS data is transmitted to the ground in real time (i.e. in the same direction as the data is collected) whereas SDS data is transmitted to the ground reversed in direction from the direction which the data is collected due to storage on satellite tape recorders prior to transmission (the recorders do not rewind prior to playback). The primary recipients of the RDS data stream are mobile remote sites. The RDS data stream consists of bit-by-bit interleaved LS and TS data, mission sensor data, telemetry data, synchronization data and calibration data. The RDS data stream (except on S10) shall be encoded with a Rate L/2 convolutional encoder of constraint length 7, with G0=1111001 and G1=1011011.

Site 4 is the System's Payload Test Facility (PTF) and receives all of the data types (SDS, SDF. RTD and RDS) for evaluation purposes.

Figure 2 shows the Block 5 spacecraft axes relevant to Figure 3 which pictorially represents the direction of scan inherent in the data.

FIGURE 1   RESERVED

3

FIGURE 1: DMSP DATA SYSTEM REPRESENTATION

3

OLS | S/C

BLOCK 5D SATELLITE

ASC
SATELLITE

DATA
STREAM
S

SDS
SDF

SDS
SDF

RTD

DATA STREAM S

DATA
STREAM
R

RECEIVER

OLSD

TRANSMITTER

RECEIVER

SITE 4

SITE 1 & 2

DATA
STREAM
F

COMPUTER
COMPLEX

PROCESSOR

SITE 3

RTD

RTD

RTD

TM

IS-YD-821

TRANSTERMS

SITE 5

SHIPBOARD
TERMINALS

EARTH

Afternoon Orbit

Morning Orbit

+Y

S/C

+X

+Z
out of
paper

v= velocity vector
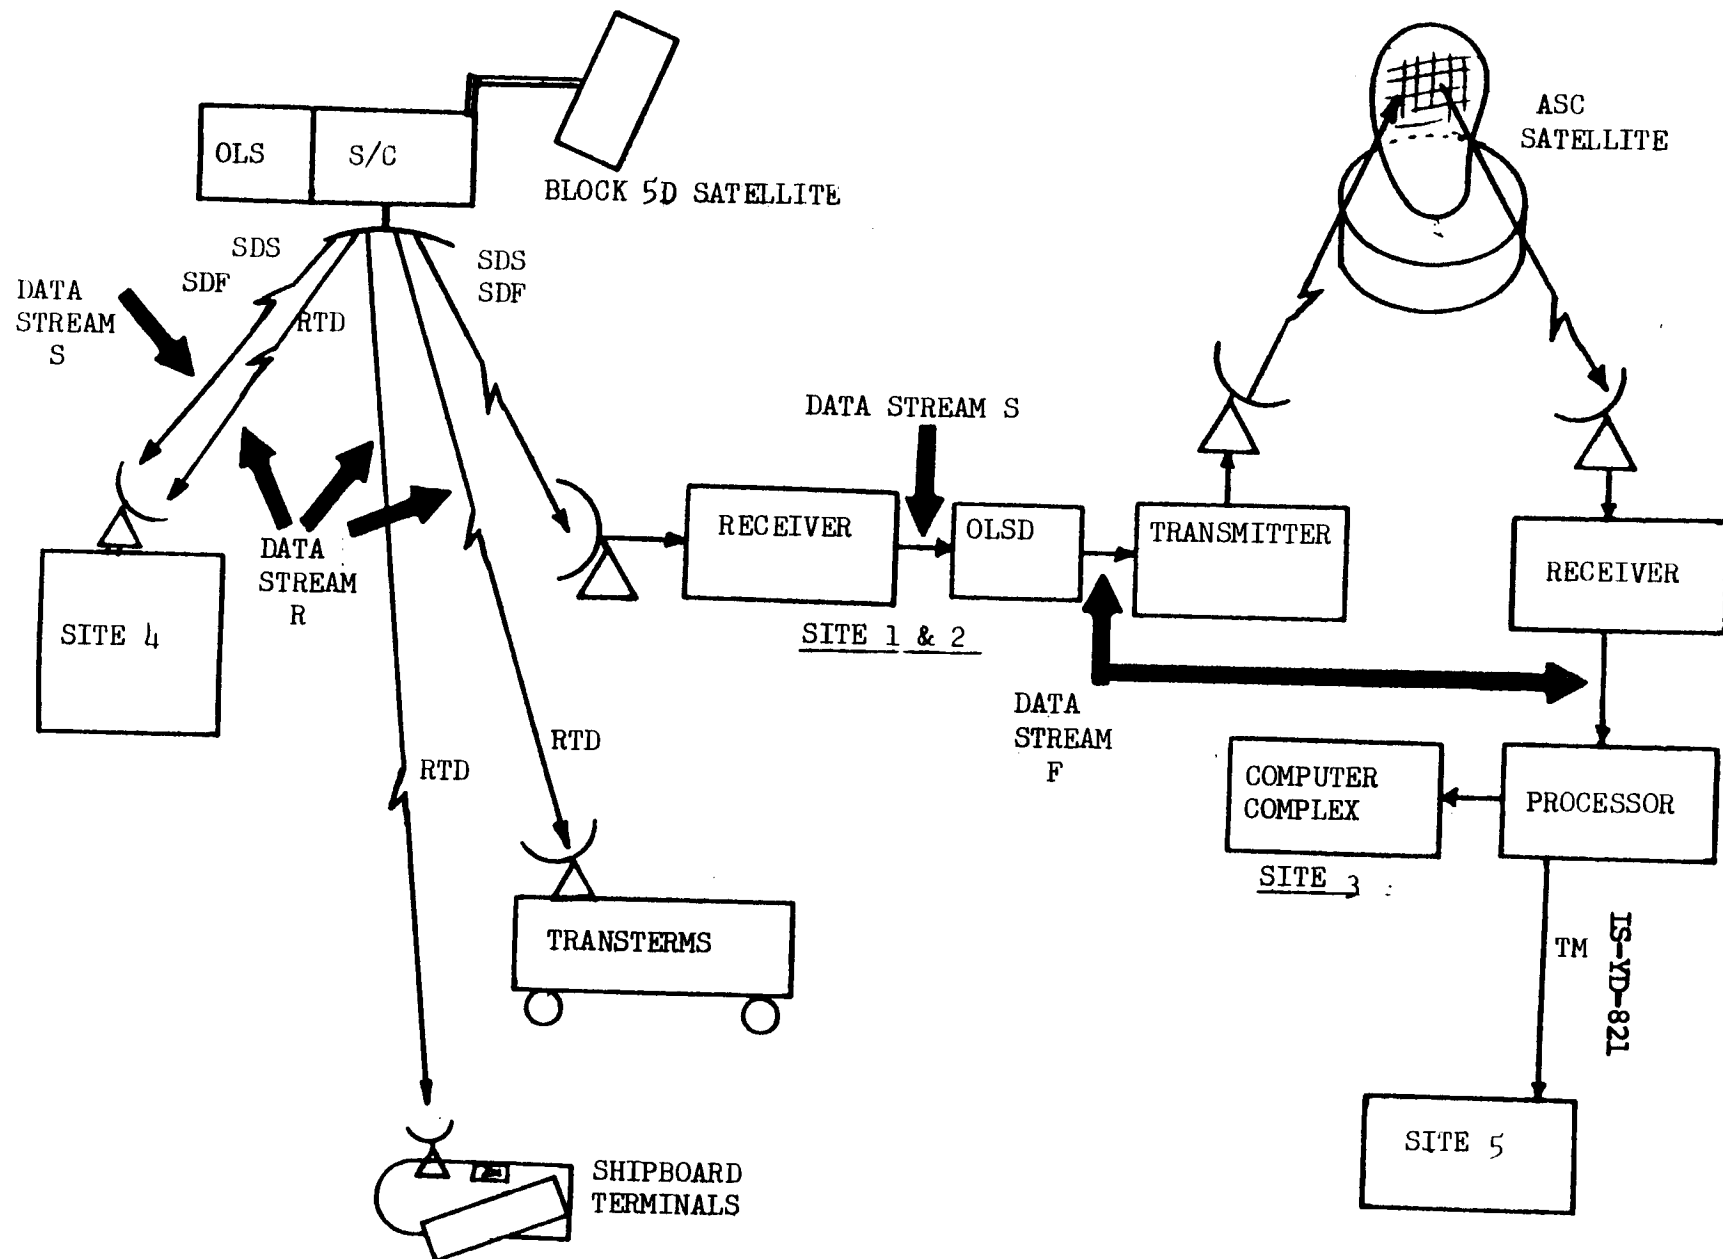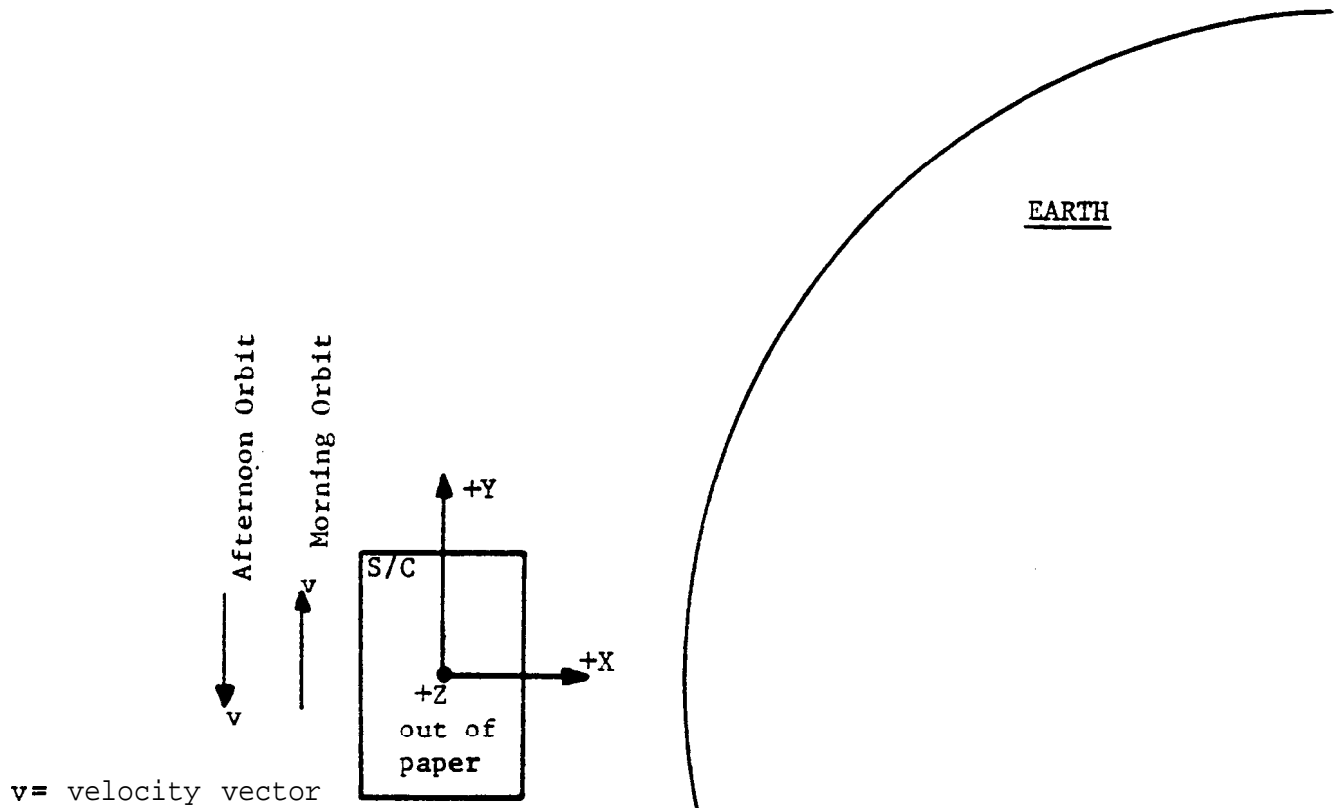
NOTES :

(1) **X Axis** - a line through the space-
craft normal to earth, posi-
tive from spacecraft toward
earth

(2) Y Axis - An axis completing an orthogonal,
right-hand X, Y, Z coordinate system.

(3) z Axis - A line normal to the plane formed by the
X-Axis and the velocity vector. The vector
from the spacecraft to the sun has a positive
component along the Z-Axis.

FIGURE 2: BLOCK 5   SPACECRAFT AXES DEFINITION

4

Terminator

Afternoon Orbit

Direction
of +Z to -z
Scan
Earth's Rotation

N

Sun

+Y   Direction
of +Z to
-Z Scan

Morning Orbit
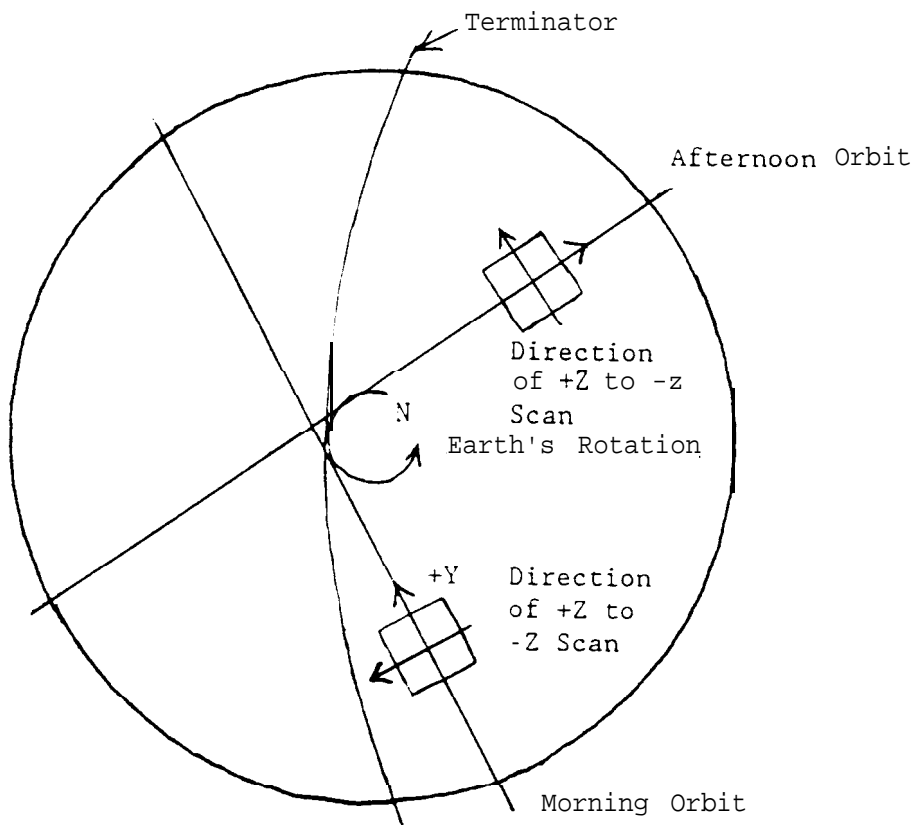
NOTES:

(1) +Z to -Z scan directions shown for typical orbit
ascending nodes.

(2) Scan Directions (as received at data relay):

DOS in Line Sync & Subsync Frame	Video Direction	Video Type
0	+z to -z	RTD
1	-z to +z	(LF & TS or TF & LS)
0	-z to +Z	SDF
1	+Z to -z	(LF, TF or LF 6 TF)
0	-Z to +Z	SDS (LS & TS)
0	+Z to -Z	RDS (LS & TS)

FIGURE 3: BLOCK 5 SCAN DIRECTION DEFINITION

2.0   <u>ABBREVIATIONS</u>   (Continued)

PMT   Photomultiplier Tube

SOAD   Start of Active Data

SOSV   Start of Smoothed Video

SSP   Special Sensor (General Term)

TERDATS   Tertiary Data Stream

TM   Telemetry

3.0 COMPLIANCE INFORMATION

This document represents the data formats for the 5D-2 model of the Operational Linescan System.

This document establishes the sensor contractual requirements for the data formats for the 5D-2 model of the Operational Linescan System (OLS).

This document defines agreements reached by the Air Force Program Management Office (PMO) and the sensor contractor as to the actual data formats that the Sensor Contractor shall insure on the 5D-2 model of the OLS as specifically stated in paragraph 3.1. Nothing in this document or its subsequent revisions shall relieve the Sensor Contractor from compliance with any other segment or interface document. If incompatibilities between other documents and this data format specifications document are discovered, the PMO shall be notified and action initiated to determine the impact of, and to minimize, the incompatibility.

3.1   SENSOR CONTRACTOR COMPLIANCE

The Sensor Contractor corporation shall provide and insure
each and every data bit location and value within the format lines
of RTD, SDS, RDS and SDF for the 5D-2 model of the OLS. The Sensor
Contractor shall insure a minimum transition density of 1 in 36 in
that part of the filler code of Figures 13 and 30 that is not
special data.

3.2   RESERVED

3.3   SENSOR CONTRACTOR CAUTION

The Sensor Contractor is cautioned on the reversing of the SDS format lines because of OLS on-board recording of data (and playback in the opposite direction).

As explained in the introduction (Para 1.2) this document refers to the formats of received baseband data from the 5D satellite.

3.4   SENSOR CONTRACTOR VERIFICATION

The Sensor Contractor shall verify each and every non video data bit location and value within the format lines of RTD, SDS, RDS, and the SDF by test. The Sensor Contractor shall verify each and every video data bit location and level within the format lines of RTD, SDS, RDS and the SDF by test.

THIS PAGE INTENTIONALLY LEFT BLANK

4.0 DATA FORMATS

This section specifies the formats used as referenced to each data type, such that the data can be reconstructed from this information. The data is arranged into a basic, repeating sequence called a frame. Only two types of frame structure are used - the SDF or SDS frame and the RTD frame. Each frame in SDS or SDF is 208 bits long and each RTD frame is 150 bits long. A series of frames, properly referenced, is called a line format. The frames within a line format contain video data, sync codes, and other information as explained in the following sections.

4.1 BLOCK 5D DATA FORMATS

Block 5D video data consists of SDF, SDS, and RTD frames of data. The SDF frame contains either TF or LF video data. The SDS frame contains either TS or LS video data. The RTD frame contains TF and LS or LF and TS video data. The special data is present in selected SDS and RTD frames. The data is obtained from a satellite which employs a bi-directional scanner.

4.1.1 SDF DATA FORMAT

4.1.1.1 FRAME FORMAT

The SDF frame format is shown in Figure 4. The frame is 208 bits long and consists of a Frame Sync Code plus 32 six bit words, all of which contain SDF video.

4.1.1.1.1 FRAME SYNC CODE

The first 13 bits of each frame consist of a frame sync code. This code is 1010110011111 where the leftmost bit is that received first at the interface.

4.1.1.1.2 TAG BITS

The three bits immediately after the last bit of the frame sync code are tag bits (refer to Figure 4 bits A, B, C). These tag bits identify the type of video in the frame. Video type is as follows:

4.0   DATA FORMATS

         This section specifies the formats used as referenced to
each data type, such that the data can be reconstructed from this
information. The data is arranged into a basic, repeating sequence
called a frame. Only two types of frame structure are used - the
SDF, SDS or RDS frame and the RTD frame. Each frame in SDS, RDS or SDF
is 208 bits long and each RTD frame is 150 bits long. A series of
frames, properly referenced, is called a line format. The frames
within a line format contain video data, sync codes, and other
information as explained in the following sections.

4.1   BLOCK 5D DATA FORMATS

         Block 5D video data consists of SDF, SDS, RDS, and RTD
frames of data. The SDF frame contains either TF or LF video data.
The SDS/RDS frame contains either TS or LS video data. The RTD
frame contains TF and LS or LF and TS video data. The special data
is present in selected SDS, RDS and RTD frames. The data is
obtained from a satellite which employs a bi-directional scanner.

4.1.1   SDF DATA FORMAT

4.1.1.1 FRAME FORMAT

         The SDF frame format is shown in Figure 4. The frame is
208 bits long and consists of a Frame Sync Code plus 32 six bit
words, all of which contain SDF video.

4.1.1.1.1 FRAME SYNC CODE

         The first 13 bits of each frame consist of a frame sync
code. This code is 1010110011111 where the leftmost bit is that
received first at the interface.

4.1.1.1.2 TAG BITS

         The three bits immediately after the last bit of the frame
sync code are tag bits (refer to Figure 4 bits A, B, C). These tag
bits identify the type of video in the frame. Video type is as
follows:

12

BIT 1

| C | B | A | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | word 1 |

$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 2
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 3
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 4
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 5
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 6
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 7
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 8
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 9
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 10
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 11
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 12
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 13
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 14
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 15
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 16
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 17
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 18
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 19
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 20
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 21
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 22
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 23
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 24
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 25
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 26
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 27
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 28
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 29
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 30
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 31
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 32
$\overline{F6}$	F5	$\overline{F4}$	F3	$\overline{F2}$	F1	word 33

BIT 208

TAG BITS

A	B	C	VIDEO MODE
0	0	1	LF
1	0	1	TF

VIDEO:

**

F1 = MSB = 2.500 Volts
F2
F3
F4
F5
F6 = $\overline{LSB}$ = 0.078 Volts

(Note Complemented Video Bits)

** as formatted by OLS on Satellite

FIGURE 4: SDF FRAME FORMAT

13

Tag Bits	Video Type
A B C	
0 0 1	LF
1 0 1	TF

4.1.1.1.3 VIDEO

The frame contains 32 fine video words. Each fine video word is digitized to a 6 bit resolution. The most significant bit (MSB) of each word is that bit received first at the interface (e.g., bit 17,23, ---). The SDF line contains 7322^{+2}_{-0} video samples per line. Nadir nominally exists between the 3661st sample and the 3662nd sample as counted from SOAD. Note that any scanner offset will affect the location of nadir. The first video sample received at the interface after the line sync sequence is the last video sample which was generated in that line. Since there is insufficient space for transition bits within the frame and in order to guarantee a higher average transition density, every other video data bit in a word is complemented. The 2nd, 4th, and 6th bits (see Figure 4) are complemented from the true value. Only actual video words are complemented.

4.1.1.1.4 RELATIONSHIP OF VIDEO TO FRAME

Video samples begin in Frame 3 (refer to Figure 5) and end in Frame 231. Frame 3 has 26^{+2}_{-0} video samples. All other frames have a full 32 video samples.

4.1.1.1.5 LINE DIRECTION

Due to the fact that the SDF video is stored on tape recorders and played back in reverse order, all data is received at the interface reversed in direction from the way the data was formatted in the satellite.

4.1.1.1.6   SCAN ANGLE OF VIDEO DATA SAMPLES

The SDF video data is corrected in the OLS so that data samples correspond to fixed scan angles. The SDF data sampling occurs at a varying sampling frequency of nominally 102.4 kHz. These data samples would occur linearly versus time if the scanner motion were nominal. When scanner motion differs from nominal, the correction places the data samples at the same scan angles as a nominal scanner motion would place them.

The scan angle ($\emptyset$) for sample number (S_i) is defined as follows:

$$\emptyset = (-1)^D * \emptyset_p * \cos\left(\frac{S_i - 1}{S_T} * M + B\right) - N * K$$

where:

D   = 0 for SDF DOS 0

         = 1 for SDF DOS 1

$\emptyset_p$ = peak scan angle = 57.85° = 1.00967 radians |

S_i = sample number in order received by the tape recorder

         (SOAD = 1, EOAD = 7322)

S_T = nominal total sample periods = 7322.179

M   = 2.66874 radians |

B   = 0.23665 radians |

N   = signed value of scanner offset in units of value K, from subsync |

         frame of data stream. (see paragraph 4.1.1.6.2)

K   = 0.00099 radians |

4.1.1.2   SDF LINE FORMAT

The SDF line format is shown in Figure 5.

r/2564M

TIME SCALE AT INTERFACE →

[230]	[231]	[232]	[233]						[1]	[2]	[3]	[4]	[5] - [229]
											(1)		
(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2) BLANK VIDEO (7) (EOAD)	(2)	(2)
VIDEO	VIDEO	BLANK	SUB SYNC FRAME	BLANK	BLANK	BLANK FRAMES	BLANK	BLANK	BLANK (25) (26) ALARM (32)	BLANK		VIDEO	VIDEO
(33)	(SOAD) (33)	(33)	(33)	(33)	(33)	(33)	(33)	(33)	(33)	(33)	(33)	(33)	(33)

32
BLANK
FRAMES
NOMINALLY

LINE
SYNC
FRAME

NOTES:
1. Frame number in [ ] is referenced to interface timing.
2. Word number within frame is in ( ).
3. In frame 3 EOAD video sample is defined as sample 8 (but samples 6 and 7 can also contain video).

FIGURE 5: SDF LINE FORMAT

4.1.1.3   LINE SYNC FRAME FORMAT

        The Line Sync Frame format is shown in Figure 6. The
first 24 video words are Blank Video codes. Following the Blank
Video words are 7 Alarm codes as follows:

4.1.1.3.1   ALARM CODES

        (1)   111110 (0 = LSB of video word)

        This alarm code is formatted in the even-numbered
fine video words starting at word 26 (refer to Figure 6 for location
of alarm codes).

        (2)   000001 (1 = LSB of video word)

        This alarm code is formatted in the odd-numbered
fine video words starting at word 27. (Refer to Figure 6 for
location of alarm codes.)

4.1.1.3.2   SCANNER OFFSET WORD

        The scanner offset word is a 4 bit number encoded in 2's
complement code which identifies the angle between the center of scan
and the sensor +X axis. The least significant bit of the scanner
offset word is 2^0 units of value .99 milliradians which is .99
milliradians. Referring to Figure 6, if Q1 is a zero, indicating
positive offset, and Q2Q3Q4 is some nonzero value then the center of
scan is the +X, -Z quadrant. If Q1 is a one, indicating negative
offset, then the center of scan is in the +X, +Z quadrant.

        In the locked encoder simulator mode the scanner offset
may change every other scan line and may be non integer.

        In the normal encoder mode the scanner offset may change
once every 2048 scan lines only when permitted by ground command and
must be integer.

        The encoder mode is indicated in the OLS equipment
status telemetry.

4.1.1.3.3   SCANNER DIRECTION

        The last two bits of word 33 identify the direction of
the actual movement of the scanner with respect to the spacecraft Z
axis. Note that the data as received at the interface appears in
reversed actual scanner direction. Both bits are identical and are
encoded as follows:

        ZERO = actual scanner rotation from the +Z axis towards
        the -Z axis.

        ONE = actual scanner rotation from the -Z axis towards
        the +Z axis.

r/2564M

BIT 1 →

C	B	A	1	1	1	1	1	0	0	1	1	0	1	0	1	word 1

0	0	0	1	1	1	word 2
0	0	0	1	1	1	word 3
0	0	0	1	1	1	word 4
0	0	0	1	1	1	word 5
0	0	0	1	1	1	word 6
0	0	0	1	1	1	word 7
0	0	0	1	1	1	word 8
0	0	0	1	1	1	word 9
0	0	0	1	1	1	word 10
0	0	0	1	1	1	word 11
0	0	0	1	1	1	word 12
0	0	0	1	1	1	word 13
0	0	0	1	1	1	word 14
0	0	0	1	1	1	word 15
0	0	0	1	1	1	word 16
0	0	0	1	1	1	word 17
0	0	0	1	1	1	word 18
0	0	0	1	1	1	word 19
0	0	0	1	1	1	word 20
0	0	0	1	1	1	word 21
0	0	0	1	1	1	word 22
0	0	0	1	1	1	word 23
0	0	0	1	1	1	word 24
0	0	0	1	1	1	word 25
0	1	1	1	1	1	word 26
1	0	0	0	0	0	word 27
0	1	1	1	1	1	word 28
1	0	0	0	0	0	word 29
0	1	1	1	1	1	word 30
1	0	0	0	0	0	word 31
0	1	1	1	1	1	word 32
R	R	Q4	Q3	Q2	Q1	word 33

BIT END →

TAG BITS			VIDEO
A	B	C	MODE
0	0	1	LF
1	0	1	TF

Scanner Offset:
Q1 = Sign *
Q2 = MSB = 2^2
Q3
Q4 = LSB = 2^0

*Negative numbers represented as 2's complement

Scan Direction = R
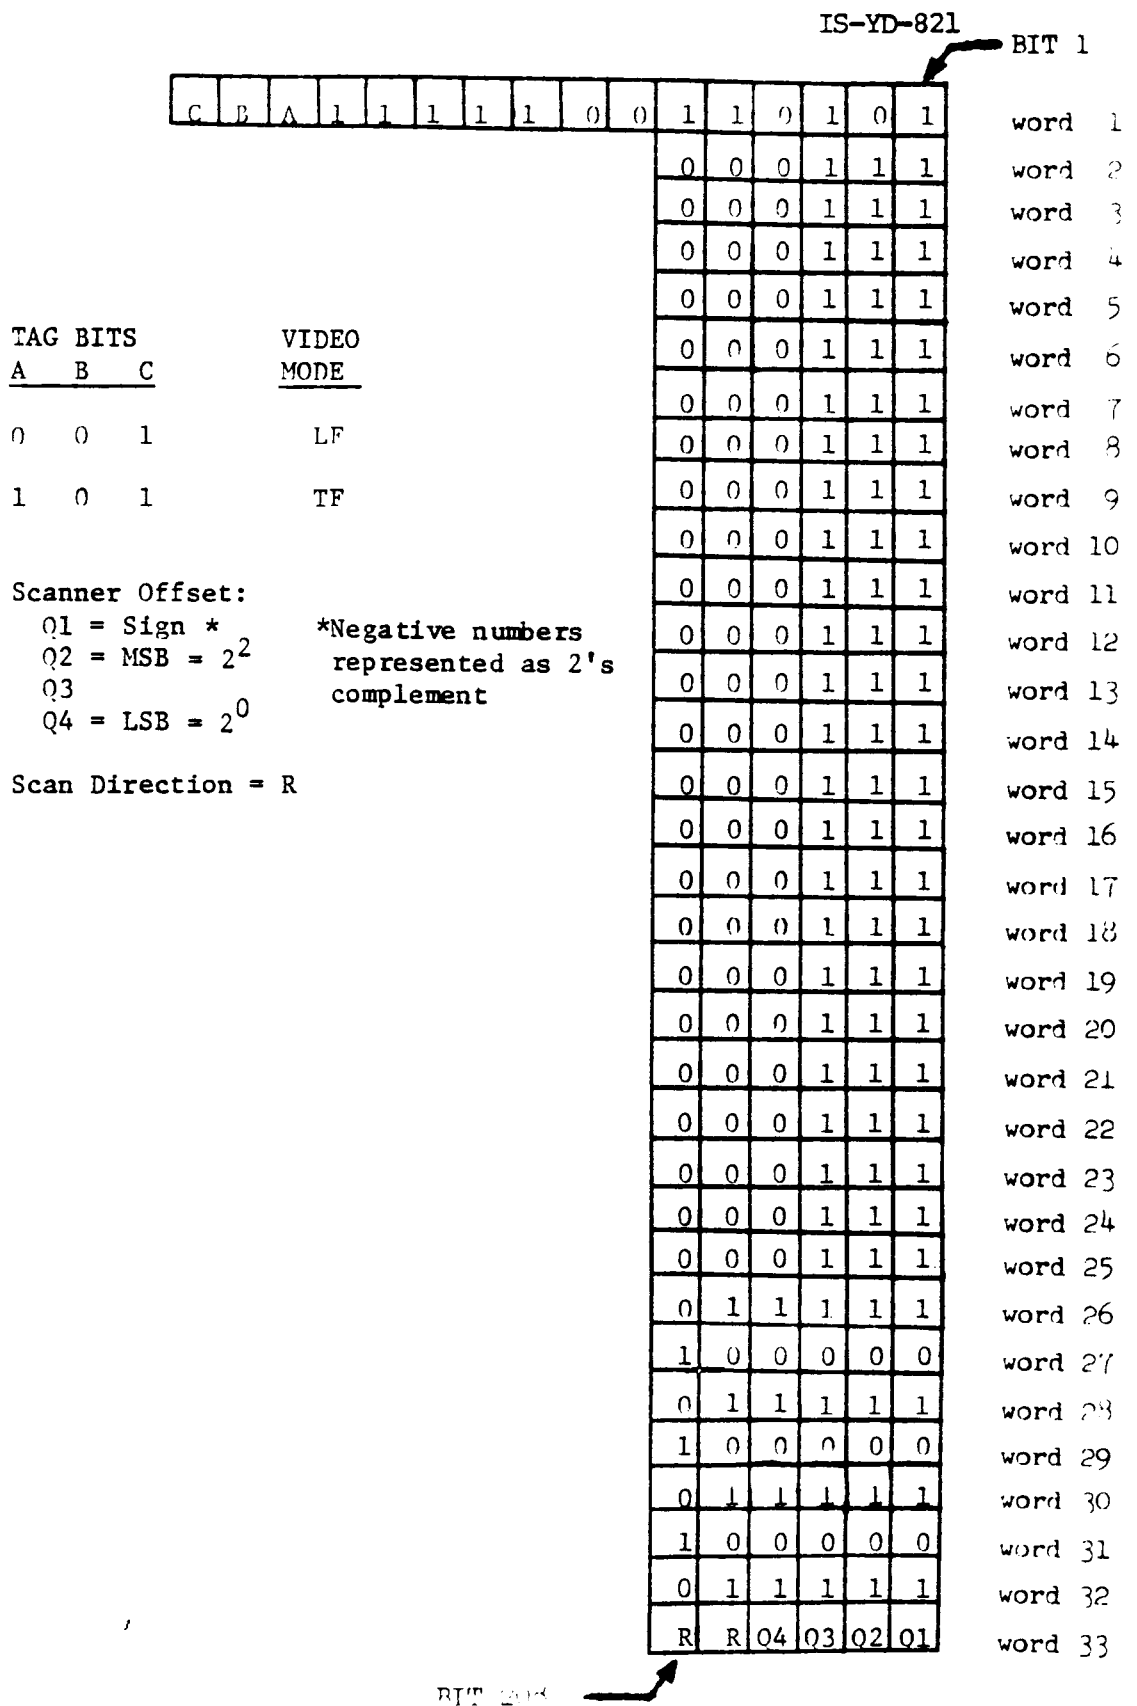
FIGURE 6: SDF LINE SYNC FRAME FORMAT

17

4.1.1.4   BLANK FRAME FORMAT

        Blank frames occur during the over scan period of the
scanner when video is not being formatted and between the Line Sync
frame and the End of Active Data (EOAD). The blank frame format is
shown in Figure 7. The nominal number of blank video words between
the Line Sync frame and the first video word is 38 (but can be 36, 37
or 38). There is also a constant number of blank video words (32) be-
tween the last video word and the Sub-Sync frame.

4.1.1.5   FAKE FRAME FORMAT

        In order to increase the SDF data rate to the standard
1.344 Mb/s bit stream, frames (called fake frames) are generated
during ground pre-processing, and inserted into the bit stream
immediately before the line sync frame (see Figure 5). Nominally
0-6 fake frames are inserted in each SDF line. The fake frame
format is shown in Figure 8.

4.1.1.6   SUB-SYNC FRAME FORMAT

        After the Start of Active Data (SOAD) there is one
blank followed by one sub-sync frame. The sub-sync frame format
is shown in Figure 9 and contains the following data.

4.1.1.6.1   ALARM CODES

        (1)   000001 as received   (1 = LSB of video word)

        This alarm code is formatted in words 2, 4, 6,
and 8. Refer to Figure 9 for the location of alarm code words.

        (2)   111110 as received   (0 = LSB of video word)

        This alarm code is formatted in words 3, 5, and
7. Refer to Figure 9 for the location of alarm code words.

4.1.1.4   BLANK FRAME FORMAT

      Blank frames occur during the over scan period of the scanner when video is not being formatted and between the Line Sync frame and the End of Active Data (EOAD). The blank frame format is shown in Figure 7. The nominal number of blank video words between the Line Sync frame and the first video word is 38 (but can be 36, 37 or 38). There is also a constant number of blank video words (32) between the last video word and the Sub-Sync frame.

4.1.1.5   Reserved

4.1.1.6   SUB-SYNC FRAME FORMAT

      After the Start of Active Data (SOAD) there is one blank followed by one sub-sync frame. The sub-sync frame format is shown in Figure 9 and contains the following data.

4.1.1.6.1   ALARM CODES

      (1)   000001 as received (1 = LSB of video word)

      This alarm code is formatted in words 2, 4, 6, and 8. Refer to Figure 9 for the location of alarm code words.

      (2)   111110 as received (0 = LSB of video word)

      This alarm code is formatted in words 3, 5, and 7. Refer to Figure 9 for the location of alarm code words.

```
                                                        BIT 1
 ┌─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┬─┐
 │C│B│A│1│1│1│1│0│0│1│1│0│1│0│1│   word  1
 └─┴─┴─┴─┴─┴─┴─┴─┴─┴─┼─┼─┼─┼─┼─┤
                     │0│0│0│1│1│1│   word  2
                     │0│0│0│1│1│1│   word  3
                     │0│0│0│1│1│1│   word  4
                     │0│0│0│1│1│1│   word  5
                     │0│0│0│1│1│1│   word  6
                     │0│0│0│1│1│1│   word  7
                     │0│0│0│1│1│1│   word  8
                     │0│0│0│1│1│1│   word  9
                     │0│0│0│1│1│1│   word 10
                     │0│0│0│1│1│1│   word 11
                     │0│0│0│1│1│1│   word 12
                     │0│0│0│1│1│1│   word 13
                     │0│0│0│1│1│1│   word 14
                     │0│0│0│1│1│1│   word 15
                     │0│0│0│1│1│1│   word 16
                     │0│0│0│1│1│1│   word 17
                     │0│0│0│1│1│1│   word 18
                     │0│0│0│1│1│1│   word 19
                     │0│0│0│1│1│1│   word 20
                     │0│0│0│1│1│1│   word 21
                     │0│0│0│1│1│1│   word 22
                     │0│0│0│1│1│1│   word 23
                     │0│0│0│1│1│1│   word 24
                     │0│0│0│1│1│1│   word 25
                     │0│0│0│1│1│1│   word 26
                     │0│0│0│1│1│1│   word 27
                     │0│0│0│1│1│1│   word 28
                     │0│0│0│1│1│1│   word 29
                     │0│0│0│1│1│1│   word 30
                     │0│0│0│1│1│1│   word 31
                     │0│0│0│1│1│1│   word 32
                     │0│0│0│1│1│1│   word 33
                     └─┴─┴─┴─┴─┴─┘
              BIT 208
```

FIGURE 7: SDF BLANK FRAME FORMAT

19

BIT 1

| C | B | A | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 | word 1 |

1	0	1	0	1	0	word 2
1	0	1	0	1	0	word 3
1	0	1	0	1	0	word 4
1	0	1	0	1	0	word 5
1	0	1	0	1	0	word 6
1	0	1	0	1	0	word 7
1	0	1	0	1	0	word 8
1	0	1	0	1	0	word 9
1	0	1	0	1	0	word 10
1	0	1	0	1	0	word 11
1	0	1	0	1	0	word 12
1	0	1	0	1	0	word 13
1	0	1	0	1	0	word 14
1	0	1	0	1	0	word 15
1	0	1	0	1	0	word 16
1	0	1	0	1	0	word 17
1	0	1	0	1	0	word 18
1	0	1	0	1	0	word 19
1	0	1	0	1	0	word 20
1	0	1	0	1	0	word 21
1	0	1	0	1	0	word 22
1	0	1	0	1	0	word 23
1	0	1	0	1	0	word 24
1	0	1	0	1	0	word 25
1	0	1	0	1	0	word 26
1	0	1	0	1	0	word 27
1	0	1	0	1	0	word 28
1	0	1	0	1	0	word 29
1	0	1	0	1	0	word 30
1	0	1	0	1	0	word 31
1	0	1	0	1	0	word 32
1	0	1	0	1	0	word 33

BIT 208

FIGURE 6: SDF FAKE FRAME FORMAT

20

Scanner Offset:
Q1 = Sign*
Q2 = MSB = 2^2
↓
Q6 = LSB = 2^{-2}
R - U = Scan Direction

*Negative numbers represented as 2's complement

0 = DOS 0, +Z to -Z
1 = DOS 1, -Z to +Z

Time code:
E1 = MSB = 2^{16} sec.
:
E27 = LSB = 2^{-10} sec.

Gain Code:
G1 = MSB = 32 db
:
G9 = LSB = .125 DB
M1 = Lin/Log (0 = Lin, 1 = Log)
M2-M4 = Sub Mode

Hot T Cal:
H0 = Segment ID (1=LEFT, 0 = RIGHT)
H1 = MSB = 2.500 Volts **
:
H8 = LSB = 0.020 Volts **

Cold T Cal:
C0 = Segment ID (1 = LEFT, 0 = RIGHT)
C1 = MSB = 2.500 Volts **
:
C8 = LSB = 0.020 Volts **
Location Data = Z1-Z32

PMT Cal:
P1 = MSB = 2.500 Volts **
:
P8 = LSB = 0.020 Volts **

Vehicle Identity:
I1 = MSB = 2^3
:
I4 = LSB = 2^0

** As formatted by OLS on Satellite

T Channel Gain OLS 8-10:
C0 = Segment ID (1 = Left, 0 = Right)
Y1 = MSB = 1.28 db
:
Y4 = LSB = 0.16 db

T Channel Gain OLS 7,11-16:
C0 = Segment ID (1 = Left, 0 = Right)
Y1 = MSB = 1.85 db
:
Y4 = LSB = 0.23 db

S = Spare Bits

																BIT 1	
C	B	A	1	1	1	1	1	0	0	1	1	0	1	0	1		word 1

1	0	0	0	0	0	word 2
0	1	1	1	1	1	word 3
1	0	0	0	0	0	word 4
0	1	1	1	1	1	word 5
1	0	0	0	0	0	word 6
0	1	1	1	1	1	word 7
1	0	0	0	0	0	word 8
R	R	Q4	Q3	Q2	Q1	word 9
E3	E2	E1	0	Q6	Q5	word 10
E9	E8	E7	E6	E5	E4	word 11
E15	E14	E13	E12	E11	E10	word 12
E21	E20	E19	E18	E17	E16	word 13
E27	E26	E25	E24	E23	E22	word 14
G6	G5	G4	G3	G2	G1	word 15
M3	M2	M1	G9	G8	G7	word 16
P4	P3	P2	P1	U	M4	word 17
I2	I1	P8	P7	P6	P5	word 18
H2	H1	H0	S	I4	I3	word 19
H8	H7	H6	H5	H4	H3	word 20
C0	S	Y4	Y3	Y2	Y1	word 21
C6	C5	C4	C3	C2	C1	word 22
Z4	Z3	Z2	Z1	C8	C7	word 23
Z10	Z9	Z8	Z7	Z6	Z5	word 24
Z16	Z15	Z14	Z13	Z12	Z11	word 25
Z22	Z21	Z20	Z19	Z18	Z17	word 26
Z28	Z27	Z26	Z25	Z24	Z23	word 27
0	0	Z32	Z31	Z30	Z29	word 28
0	0	0	1	1	1	word 29
0	0	0	1	1	1	word 30
0	0	0	1	1	1	word 31
0	0	0	1	1	1	word 32
0	0	0	1	1	1	word 33

BIT 208

Unused Bits: 67, 177 to 208

FIGURE 9: SDF SUB-SYNC FRAME FORMAT (OLS 7-16)

20

Scanner Offset:
  Q1 = Sign*
  Q2 = MSB — 2^2 *Negative numbers
  ↓   represented as 2's
  Q6 = LSB — 2^{-2} complement
R — U = Scan Direction   0 — DOS 0, +Z to -Z
                         1 — DOS 1, -Z to +Z
Time code:
  E1 = MSB — 2^{16} sec.
  :
  E27 = LSB — 2^{-10} sec.
Gain Code:
  G1 — MSB — 32 db
  :
  G9 — LSB — .125 DB
  M1 — Lin/Log (0 — Lin, 1 — Log)
  M2-M4 — Sub Mode
Hot T Cal:
  H0 = Segment ID (1–LEFT, 0 — RIGHT)
  H1 = MSB — 2.500 Volts **
  :
  H8 = LSB = 0.020 Volts **
Cold T Cal:
  C0 — Segment ID (1 — LEFT, 0 — RIGHT)
  C1 — MSB — 2.500 Volts **
  :
  C8 — LSB — 0.020 Volts **
Location Data — Z1–Z32
PMT Cal:
  P1 — MSB — 2.500 Volts **
  :
  P8 — LSB — 0.020 Volts **
Vehicle Identity:
  I1 = MSB — 2^3 ** As formatted by
  :   OLS on Satellite
  I4 = LSB — 2^0
T Channel Gain:
  C0 = Segment ID (1 — Left, 0 — Right)
  Y1 = MSB — 2.352 db
  :
  Y5 = LSB — 0.147 db

S — Spare Bits

						BIT 1	
C	B	A	1 1 1 1 1 0 0	1 1	0 1 1 0 1		word 1
1	0	0	0	0	0		word 2
0	1	1	1	1	1		word 3
1	0	0	0	0	0		word 4
0	1	1	1	1	1		word 5
1	0	0	0	0	0		word 6
0	1	1	1	1	1		word 7
1	0	0	0	0	0		word 8
R	R	Q4	Q3	Q2	Q1		word 9
E3	E2	E1	0	Q6	Q5		word 10
E9	E8	E7	E6	E5	E4		word 11
E15	E14	E13	E12	E11	E10		word 12
E21	E20	E19	E18	E17	E16		word 13
E27	E26	E25	E24	E23	E22		word 14
G6	G5	G4	G3	G2	G1		word 15
M3	M2	M1	G9	G8	G7		word 16
P4	P3	P2	P1	U	M4		word 17
I2	I1	P8	P7	P6	P5		word 18
H3	H2	H1	H0	I4	I3		word 19
Y1	H8	H7	H6	H5	H4		word 20
C0	S	Y5	Y4	Y3	Y2		word 21
C6	C5	C4	C3	C2	C1		word 22
Z4	Z3	Z2	Z1	C8	C7		word 23
Z10	Z9	Z8	Z7	Z6	Z5		word 24
Z16	Z15	Z14	Z13	Z12	Z11		word 25
Z22	Z21	Z20	Z19	Z18	Z17		word 26
Z28	Z27	Z26	Z25	Z24	Z23		word 27
0	0	Z32	Z31	Z30	Z29		word 28
0	0	0	1	1	1		word 29
0	0	0	1	1	1		word 30
0	0	0	1	1	1		word 31
0	0	0	1	1	1		word 32
0	0	0	1	1	1		word 33

BIT 208
Unused Bits: 67, 177 to 208

FIGURE 9a: SDF SUB-SYNC FRAME FORMAT (OLS 17 and up)

21

821sc7 wn/6

4.1.1.6.2   <u>SCANNER OFFSET WORD</u>

The scanner offset word is a 6 bit number encoded in 2's complement code which identifies the angle between the center of scan and the sensor +X axis. The least significant bit of the scanner offset word is 2^{-2} units of value .99 milliradians, which is .25 milliradians. Referring to Figure 9, if Q1 is a zero, indicating positive offset, and Q2Q3Q4Q5Q6 is some nonzero value then the center of scan is in the +X, -Z quadrant. If Q1 is a one, indicating negative offset, then the center of scan is in the +X, +Z quadrant.

In the locked encoder simulator mode the scanner offset may change every other scan line and may be non integer.

In the normal encoder mode the scanner offset may change once every 2048 scan lines only when permitted by ground command and must be integer.

The encoder mode is indicated in the OLS equipment status telemetry.

4.1.1.6.3   <u>SCANNER DIRECTION</u>

The last two bits of word 9 identify the direction of the actual movement of the scanner with respect to the satellite Z axis. Note that the data as received at the interface appears in reversed actual scanner direction. Both bits are identical and are encoded as follows:

ZERO = Actual scanner rotation from the +Z axis towards the -Z axis.

ONE = Actual scanner rotation from the -Z axis towards the +Z axis.

4.1.1.6.4   <u>TIME CODE</u>

Words 10 through 14 define a 27 bit time code. The code is a pure binary number with the least significant bit equal to 1/1024 second. The time code word in the sub-sync frame is the value of the elapsed time counter coincident with the NADIR crossing of the next received video line. The elapsed time counter (which is updated approximately once daily) is a spacecraft clock which provides the reference to spacecraft position and hence gives the ground reference of the data taken at the center of scan of the sensor.

4.1.1.6.5   <u>GAIN CODE</u>

Words 15, 16, and 17 contain a 9 bit gain code plus 4 bits to identify the sub-mode being used. Refer to Figure 9 for

r /2564M

the location of the gain code. The gain code gives the necessary information required to determine the gain operating status of the visual processing for each scan. The gain value references the gain value for the last sample received (first sample of active video) if the gain automatically changes during the scan. If the gain mode is PGC then that gain value is the gain for the last video line received. The 4 bits (M1-M4) used to identify the sub-mode are given below:

M1	Mode
0	Gain states in visual processor are linear.
1	Gain states in visual processor are logarithmic.

M2	M3	M4	Mode
0	0	0	UNUSED
0	0	1	ASGC
0	1	0	ATGC
1	0	0	PGC/HRD
1	0	1	PGC/PMT1/9
1	1	0	PGC/PMT - LOW
1	1	1	PGC/PMT - HIGH
0	1	1	SPARE

The three modes for gain control by the processor are: Along Scan Gain Control (ASGC), Along Track Gain Control (ATGC), and Preset Gain Control (PGC). The processor is in only one mode per scan cycle. The mode is commanded from the ground and this mode is set up by the processor during the positive end of scan.

001

4.1.1.6.6   CALIBRATION WORDS

The remaining video slots contain various calibration signals. These signals are shown in Figure 9 and are as follows:

(1) Hot T Cal: 8 bits resolution + 1 bit segment I.D.

The Hot T Cal value is updated during each +Z EOS (end of scan) and this value is repeated for the -Z EOS.

(2) Cold T Cal: 8 bits resolution +1 bit segment I.D.

The Cold T Cal value is updated during each -Z EOS (end of scan) and this value is repeated for the +Z EOS.

The two infrared calibration (T-Cal) words provide the temperatures of the blackbody sources on the sensor. The segment I.D. bit identifies the segment of the T-detector being calibrated.

(3) Location Data:

The information contained in the 32 bits designated Z1-Z32 in Figure 9 refers to the parameters used by ground processing to locate the satellite subpoint (longitude, latitude, cosine crossing angle) and those parameters used by the OLS to determine the Along Scan Gain Control (ASGC) mode. Figures 10 and 11 give the content of the location data. Included with the location data is a time code (EPHCLK) which references the time of calculation of all the information downlinked in the Z1-Z32 bits in SDF. The data is downlinked in the sequence: Word 5 thru Word 1. Because the timing of receipt of the words from the spacecraft is not synchronized to the SDF line, one or more of the location data words may be repeated.

r /25642M

```
                                                                    LSB
        1                    13 14                    29 30  31   32
       |--------------------------|----------------------|--|--|--|--|
WORD   |      EPH CLOCK           |     LONGITUDE        |  |  |  |  |
ONE    |      13 BITS             |     16 BITS          | 0| 0| 1|  |
       |--------------------------|----------------------|--|--|--|--|
       |MSB = 2^8 SEC LSB = 2^-4 SEC| MSB           LSB  |  |  |  |  |

        MSB                                                        LSB
        1                        15 16                  29 30  31   32
       |--------------------------|----------------------|--|--|--|--|
WORD   |                          |      COSINE          |  |  |  |  |
TWO    |      LATITUDE            | CROSSING ANGLE       |  |  |  |  |
       |      15 BITS             |     14 BITS          | 0| 1| 0|  |
       |--------------------------|----------------------|--|--|--|--|
       |MSB              LSB | MSB                LSB    |  |  |  |  |

        MSB                                                        LSB
        1                      14 15                    29 30  31   32
       |--------------------------|----------------------|--|--|--|--|
WORD   |      COS SOLAR AZ        |     SOLAR EL         |  |  |  |  |
THREE  |      14 BITS             |     15 BITS          | 0| 1| 1|  |
       |--------------------------|----------------------|--|--|--|--|
       |MSB            LSB | MSB                   LSB   |  |  |  |  |

        MSB                                                        LSB
        1                      14 15                    29 30  31   32
       |--------------------------|----------------------|--|--|--|--|
WORD   |      H/R                 |      EPH CLOCK       |  |  |  |  |
FOUR   |      14 BITS             |      15 BITS         | 1| 0| 0|  |
       |--------------------------|----------------------|--|--|--|--|
       |MSB            LSB | MSB = 2^17 SEC   LSB = 2^3 SEC|  |  |  |

        MSB                                                        LSB
        1            8 9              21 22             29 30  31   32
       |-------------|----------------|----------------|--|--|--|--|
       |  COSINE OF  |                |                |  |  |  |  |
WORD   |  LUNAR AZ   |   LUNAR EL     |  LUNAR PHASE   |  |  |  |  |
FIVE   |  8 BITS     |   13 BITS      |  8 BITS        | 1| 0| 1|  |
       |-------------|----------------|----------------|--|--|--|--|
       |MSB      LSB | MSB        LSB | MSB       LSB  |  |  |  |  |
```

TAG BITS(Z30-Z32)			CODE
30	31	32	
0	0	0	NO DATA
0	0	1	WORD 1
0	1	0	WORD 2
0	1	1	WORD 3
1	0	0	WORD 4
1	0	1	WORD 5
1	1	0	SPARE
1	1	1	SPARE

FIGURE 10. LOCATION DATA WORDS

gp/0052R

25

MSB   LSB
1   13 14   29 30 31 32

WORD ONE: ← EPH CLOCK 13 BITS → | ← LONGITUDE 16 BITS → | 0 0 1
MSB = 2^8 SEC   LSB = 2^{-4} SEC   MSB   LSB

WORD TWO: ← LATITUDE 15 BITS → | ← COSINE CROSSING ANGLE 14 BITS → | 0 1 0
MSB   LSB   MSB   LSB

WORD THREE: ← COS SOL AZ 14 BITS → | ← SOL EL 15 BITS → | 0 1 1
MSB   LSB   MSB   LSB

WORD FOUR: ← H/R 14 BITS → | ← EPH CLOCK → | 1 0 0
MSB   LSB   MSB = 2^{17} SEC   LSB = 2^3 SEC

TAG BITS (Z30-Z32)			CODE
30	31	32	
0	0	0	NO DATA
0	0	1	WORD 1
0	1	0	WORD 2
0	1	1	WORD 3
1	0	0	WORD 4

Figure 10: Location Data Words

PARAMETER	UNITS	SIGN BIT IN MSB BIT	CONTENT RANGE
EPH CLK	SECONDS	N/A	$2^{17} - 2^{-4}$
LONGITUDE	π RADIANS	S	$2^{-1} - 2^{-15}$
LATITUDE	π RADIANS	S	$2^{-1} - 2^{-14}$
COSINE CROSSING ANGLE	NONE	S	$2^{-1} - 2^{-13}$
COSINE SOLAR AZIMUTH	NONE	S	$2^{-1} - 2^{-13}$
SOLAR ELEVATION	DEGREES	S	$2^{6} - 2^{-7}$
h/R	EARTH RADII (R=6378.145km)	0	$2^{-3} - 2^{-15}$

S = Sign Bit with negative numbers represented as 2's complement.

FIGURE 11: LOCATION DATA WORDS CONTENT

Paramter	Units	Sign Bit	Bit Range MSB-LSB
EPH CLK	Seconds	N/A	$2^{17} - 2^{-4}$
Longitude	π Radians	S	$2^{-1} - 2^{-15}$
Latitude	π Radians	S	$2^{-1} - 2^{-14}$
Cosine Crossing Angle	None	S	$2^{-1} - 2^{-13}$
Cosine Solar Azimuth	None	S	$2^{-1} - 2^{-13}$
Solar Elevation	Degrees	S	$2^{6} - 2^{-7}$
h/R	Earth Radii (R = 6378.145 Km)	0	$2^{-3} - 2^{-15}$
Cosine Lunar Azimuth	None	S	$2^{-1} - 2^{-7}$
Lunar Elevation	Degrees	S	$2^{6} - 2^{-5}$
Lunar Phase	Degrees	N/A	$2^{7} - 2^{0}$

S = Sign bit with negative numbers represented as 2's complement.

Figure 11.   Location Data Words Content

gp/0052R

26

(4) PMT Cal: 8 bits resolution.

The PMT Cal value is updated during each -Z EOS (end of scan) and this value is repeated for the +Z EOS.

The photomultiplier calibration (PMT Cal) word provides the data from the self-calibration of the PMT on the sensor.

(5) Vehicle Identity: 4 bits resolution.

A unique code to identify each spacecraft will be inserted into the four bits for vehicle identity.

(6) T Channel Gain: 4 bits resolution OLS 7-16;
                      5 bits resolution OLS 17 and up.

The T Channel Gain value is variable to allow compensation for any degradation effects since channel adjustment. The Cold T Cal segment I.D. bit identifies the segment of the T Channel whose gain is indicated. T Channel gain for one of the segments is updated at each -Z overscan alternating between the two segments at each update. The indicated segment gain applies to all video in the four SDF data lines consisting of the DOS 0/DOS 1 line pair whose subsync frames contain the same segment I.D. and the immediately preceding received line pair.

821sc7 vm/7

4.1.2   SDS AND RDS DATA FORMAT

4.1.2.1   FRAME FORMAT

The SDS and RDS frame format is shown in Figure 12. The frame is 208 bits long and consists of a Frame Sync Code, 10 bits of special data, and 26 video words. The SDS and RDS frame is different in structure from the SDF frame. With reference to Figures 12, 15, 16, 18 and 21 Bit 1 is the first bit received at the interface in SDS. In RDS Bit 1 is the last bit received at the interface and Bit 208 is the first bit received at the interface.

4.1.2.1.1 FRAME SYNC CODE

The first 13 bits of each frame consists of a frame sync code. This code is 1010110011111 where the leftmost bit is that received first at the interface.

4.1.2.1.2 TAG BITS

The three bits immediately following the last bit of the frame sync code are tag bits (refer to Figure 12, bits A, B & C). These tag bits identify the type of video data in the frame. Video type is as follows:

Tag Bits			Video Type
A	B	C	
0	1	1	LS
1	1	1	TS

Note that LS and TS data line formats contain the same time codes, sub-sync codes and differ only in actual data and tag bits. Therefore, LS and TS data could be interleaved for processing. the 7th bit in the LS video data is the LSB (or 8th bit) of the TS video. Thus, a total of 8 bits comprises a TS video sample and a total of 6 bits comprises a LS video sample.

4.1.2.1.3 SPECIAL DATA

The ten bits immediately subsequent to the tag bits is a special data word. A group of special data words comprises a special data message (See Figure 13). A typical message as received consists of data followed by data format section followed by the time code and sync code. Note that every other SSP bit is complemented starting with the first bit after the format section. Thirty six (36) bit SSP data words may be separated by a filler word.

1	1	1	1	1	0	0	1	1	0	1	0	1	BIT 1 / word 1
S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	C	B	A	word 2
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 3
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 4
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 5
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 6
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 7
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 8
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 9
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 10
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 11
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 12
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 13
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 14
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 15
						$V7$	$\overline{V6}$	$V5$	$V4$	$V3$	$\overline{V2}$	$V1$	word 16
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 17
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 18
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 19
						$V7$	$V6$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 20
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$V2$	$V1$	word 21
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 22
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 23
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 24
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 25
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 26
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	word 27
						$V7$	$\overline{V6}$	$V5$	$\overline{V4}$	$V3$	$\overline{V2}$	$V1$	BIT 208 / word 28

TAG BITS   VIDEO
A B C   MODE
0 1 1   LS
1 1 1   TS

TS VIDEO: **
   V1 = MSB = 2.500 Volts
   V2
   V3
   V4
   V5
   V6
   V7 = 0.039 Volts
   V8 = LSB = 0.019 volts
       (V7 of LS Video)

LS VIDEO: **
   V1 = MSB = 2.500 Volts

   V2

   V3

   V4

   V5

   V6 = LSB = 0.078 Volts

   V7 = LSB of TS Video

(Note Complemented Video Bits)

SPECIAL DATA: S1-S10

** as formatted by OLS
   on Satellite

FIGURE 12:   SDS AND RDS FRAME FORMAT

29

1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1	
1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1	SYNC CODE
1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1	
1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1	

$T1 = MSB = 2^{16} sec$

T12	T13	T14	T15	T16	T17	T18	T19	T20	T21	T22	T23	T24	T25	T26	T27	
0	0	0	0	0	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11	TIME CODE

FIRST
SENSOR ——>
REFERENCED

F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12	F13	F14	F15	F16

PARITY BIT
NOT USED IN
PROCESSING

DESIGNATION FOR
LOCATION OF SENSOR
DATA (F12)
0=IN LS LINE
1=IN TS LINE

↓ F2				F11	F12	F13			F16
P	# OF 36 BIT WORDS PER SENSOR			LSB	LS/ TS	SENSOR I.D.			LSB

"FORMAT KEY"

12 SENSOR
FORMAT WORDS

F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12	F13	F14	F15	F16
D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$

←— FIRST BIT OLS
RECEIVES FROM
THE SENSOR

TIME SCALE
AT INTERFACE
IN SDS

A

NOTE THAT EVERY
OTHER SSP DATA
BIT IS COMPLEMENTED

LSB OF FIRST
WORD OF FIRST
SENSOR

SPECIAL SENSOR
DATA REFERENCED BY
FORMAT WORDS

| MSB OF LAST WORD
↓ OF LAST SENSOR

D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$	D	$\bar{D}$
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	0
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1

←— LSB OF FIRST
FILLER WORD

TIME SCALE
AT INTERFACE
IN RDS

V

BITS NOT REFERENCED
BY SENSOR FORMAT
WORDS

←— FIRST BIT RECEIVED AT INTERFACE IN SDS
LAST BIT RECEIVED AT INTERFACE IN RDS

FILLER BIT CODE –
NOTE THAT EVERY
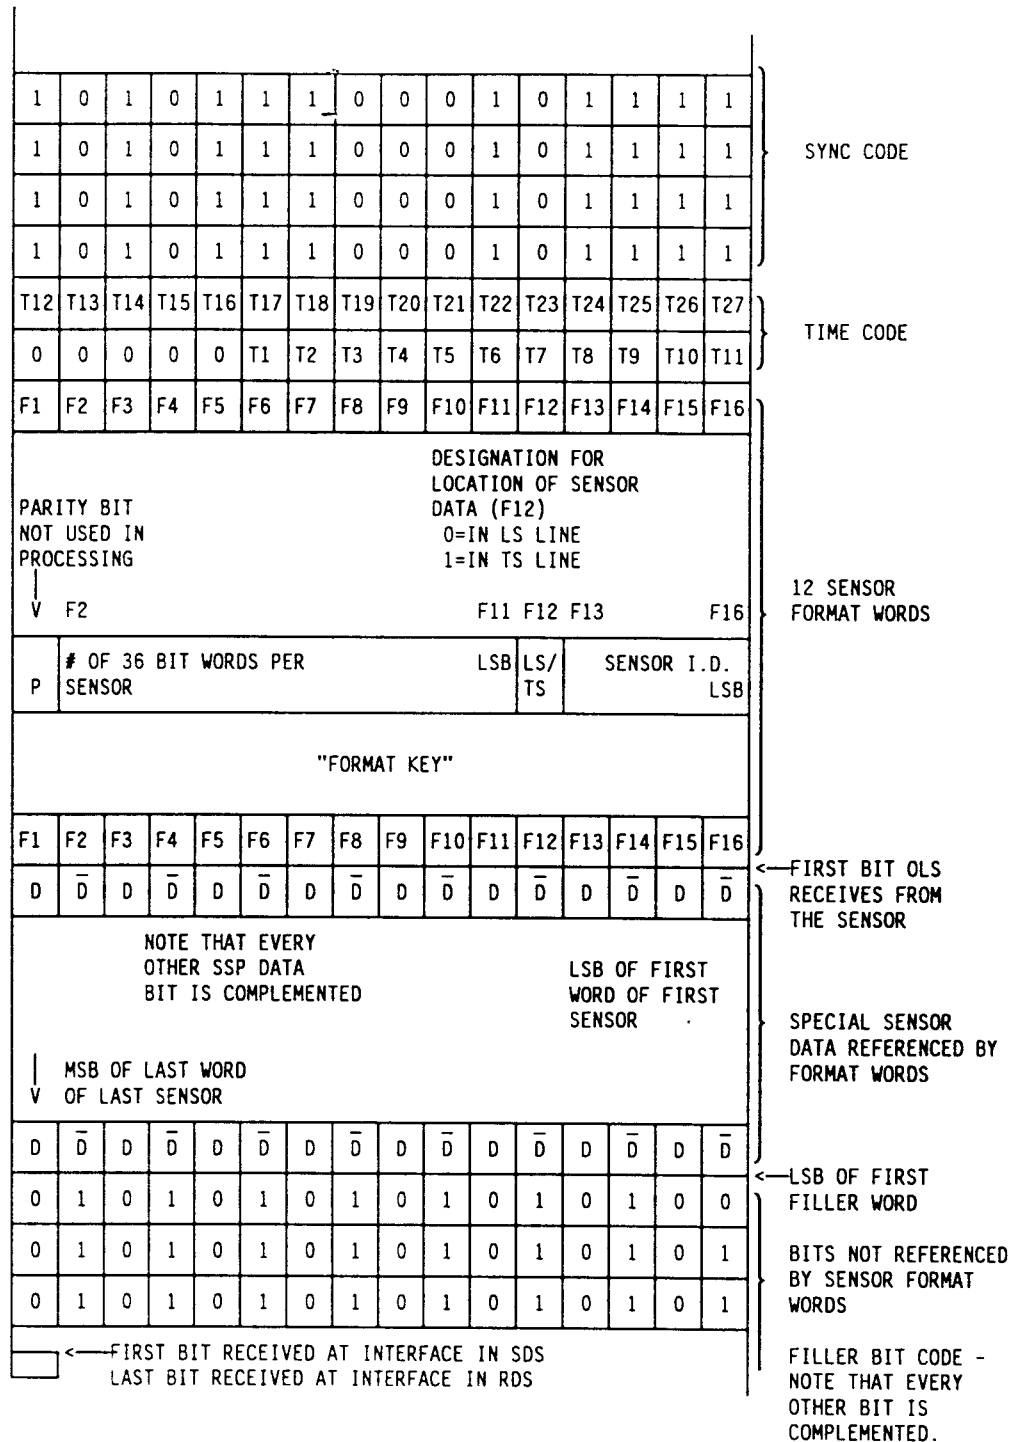OTHER BIT IS
COMPLEMENTED.

FIGURE 13:   SSP MESSAGE FORMAT

30

The data is formatted in contiguous blocks of sensor data. Each block could contain data from a separate special sensor. Note that different special data will be contained in the LS data line format from that in the TS data line format. The LS data line will contain a special data message of a minimum 2160 bits per record of which 288 bits are used for overhead. The TS data line will contain a special data message of a minimum of 3888 bits per record of which 288 bits are used for over-head. The SSP data message is reconstructed by storing, as received, the S1-S10 bits of each frame. SSP data is located in bits 27 thru 208 of frame 2 and 27 thru 145 of frame 3 for both LS and TS mode. SSP data in the TS mode only is located in bits 202 thru 208 of the sub-sync frame, 27 thru 152 of the line sync frame, and bits 27 thru 208 of the four frames between the sub-sync and line sync (see Figure 14). The message is then interrogated in the opposite direction as received for the Sync Code, Time Code, Format Section, and SSP data. The first SSP data bit following the Format Section (the right most bit in Figure 30) is the LSB of the first word of the first sensor specified in the Format Section for the LS data stream. For the TS data stream it's for the first sensor identified with a T bit flag. For both LS and TS data streams, the first and every other SSP data bit is complemented. This bit and every other SSP data bit (all odd bits) require re-complementing before data use. The bits following the SSP data bits of the reconstructed SSP message are filler bits. The Sync Code, Time Code, and Format Section are identical for each inter-leaved LS and TS data line. The Time Code will change for each new interrogation cycle and the value will differ by 1 ± 0.005 second between adjacent SSP records. The Sync Code will not change. The Format Section can change in both LS and TS by command (however, it will be identical in LS and TS).

4.1.2.1.3.1 TIME CODE

Each special data message includes a time code which references that special data message to the count of the elapsed time counter time coincident with the read clock of the first sensor interrogated for data (see Figure 13). The OLS interrogates the special sensors in the order and way they are defined in the format section, with the first sensor being that which follows the Time Code section. The MSB of the time code is bit T1.

    (1) Number of bits of time code = 27

    (2) Value of LSB of time code (=T27) = 2^{-10} seconds

4.1.2.1.3.2 FORMAT SECTION

Since there are up to 12 special sensors on the spacecraft, twelve format words in the special data message are used to identify each sensor, the number of 36 bit words in each block of data, and the location of the sensor's data (either in the LS or TS data line).

The Format Section provides the number of 36 bit words per sensor included in the SSP message. The OLS will interrogate each SSP for an integral number of 36 bit words. The actual data bit count of an SSP will not be known from only knowing the Format Section, since the sensor's data may not be divisible by 36. If an SSP has properly indicated to the OLS that it is "off" or has "invalid data", the OLS will insert a unique code replacing the SSP's data. That special code (filler word) is a one in the LSB position and 35 zeros in the other bit positions. The Format Section will not be modified and the correct number of 36 bit words will be included in the SSP message. Note that the special code will be complemented as SSP data is complemented.

The Format Section also includes an identifier bit designating whether the SSP's data is contained within the SSP bits of the LS data line or within the SSP bits of the TS data line. Within the Format Section, the first sensor format word (so identified in figure 13) precedes the Time Code (as received at the interface in SDS mode) and references the last data bits received at the interface in SDS mode. Within the Format Section, the first sensor format word (so identified in Figure 13) follows the Time Code (as received at the interface in RDS mode) and references the first data bits received at the interface in RDS mode.

Figure 13 shows the reconstructed SSP message (after received and stored in a buffer bottom to top). Reading from top to bottom, the ground should command the format section so that all LS data line sensors appear first and then all TS data line sensors. Then the LS data line will contain all special sensor data that can be formatted within its timing boundaries starting from top to bottom. Thus, it is possible to have T designated sensors to have their data appear in the LS data stream. The TS data line will contain special sensor data that has a T bit designation.

4.1.2.1.3.3 <u>DATA</u>

Since the special data message is reversed in the satellite due to the recording process (SDS only), the ground equipment may be required to store the special data message for processing. Note that every other SSP data bit requires complementing before use (see Figure 13).

4.1.2.1.4 <u>VIDEO</u>

The frame contains 26 smoothed video words. TS video samples are digitized to 8 bits resolution and LS video samples are digitized to 6 bits resolution. The most significant bit (MSB) of each word is that bit received first at the interface (V1 of Figure 12). The SDS and RDS line contains 1465 video samples. Nadir nominally exists at sample number 733 for L data and at sample number 733.5 for T data as counted from SOSV. Note that any scanner offset will affect the location of nadir. Since there is insufficient space for transition bits within the frame and in order to guarantee a higher average transition density, every other video data bit in a word is complemented. The 2nd, 4th and 6th bits of video are the complement of the true value (see Figure 12). Only actual video words are complemented.

4.1.2.1.5   RELATIONSHIP OF VIDEO TO FRAME

Video samples begin in Frame 3 (refer to Figure 14) and end in Frame
59. Frame 3 has 9 video samples. All other frames have a full 26 video
samples.

4.1.2.1.6   SCANNER DIRECTION

SDS video is stored in the satellite memory and is read into the
satellite recorders such that the alternating scan direction is
eliminated. RDS video is temporarily stored in the satellite memory
such that the alternating scan direction is eliminated.

4.1.2.1.7   SCAN ANGLE OF VIDEO DATA SAMPLES

The SDS and RDS video data is corrected in the OLS so that data
samples correspond to fixed scan angles. The data sampling occurs at a
varying sampling frequency of nominally 20.48 kHz. These data samples
would occur linearly versus time if the scanner motion were nominal.
When scanner motion differs from nominal, the correction places the data
samples at the same scan angles as a nominal scanner motion would place
them.

The T SDS and RDS data is shifted approximately one-half sample
toward +Z to allow the sample-hold and A/D converter to be shared by
both L and T data.

The scan angle ($\emptyset$) for sample number (S_i) is defined as
follows:

$$\emptyset = \emptyset_p * \cos\left(\frac{S_i - 1}{S_T} * M + B\right) - N * K$$

where:

$\emptyset_p$ = peak scan angle = 57.85° = 1.00967 radians

S_i = sample number in order received by the tape recorder
(SOSV = 1, EOAD = 1465)

S_T = nominal total sample periods = 1464.436

M = 2.66874 radians

B = 0.23686 radians for L data
= 0.23591 radians for T data

N = signed value of scanner offset, in units of value K,
from subsync frame of data stream. (See paragraph
4.1.2.6.2)

K = 0.00099 radians

4.1.2.2   SDS AND RDS LINE FORMAT

The SDS and RDS line format is shown in Figure 14.

4.1.2.3   LINE SYNC FRAME FORMAT

The Line Sync Frame format is shown in Figure 15.

Words 3 through 19 are telemetry data with word 20 being the telemetry word count in the LS data stream, while words 3 through 20 are SSP data information in the TS data stream. Words 21 through 27 are the 7 alarm code words. Word 28 is the scanner offset word.

4.1.2.3.1 ALARM CODES

(1)   111110 (0 = LSB of video word)

This alarm code is formatted in the odd-numbered video words starting at word 21. (Refer to Figure 15 for location of alarm codes.)

(2)   000001 (1 = LSB of video word)

This alarm code is formatted in the even-numbered video words starting at word 22. (Refer to Figure 15 for location of alarm codes.)

4.1.2.3.2 SCANNER OFFSET WORD

The scanner offset word is a 5 bit number encoded in 2's complement code which identifies the angle between the center of scan and the sensor +X axis. The least significant bit of the scanner offset word is 2^{-1} units of value .99 milliradians which is .49 milliradians. Referring to Figure 15, if Q1 is a zero, indicating positive offset, and Q2Q3Q4Q5 is some nonzero value then the center of scan is in the +X, -Z quadrant. If Q1 is a one, indicating negative offset, then the center of scan is in the +X, +Z quadrant.

In the locked encoder simulator mode the scanner offset may change every other scan line and may be non integer.

In the normal encoder mode the scanner offset may change once every 2048 scan lines only when permitted by ground command and must be integer.

The encoder mode is indicated in the OLS equipment status telemetry.

TIME SCALE AT INTERFACE RDS

TIME SCALE AT INTERFACE IN SDS

[58]	[59]							[1]	[2]	[3]	[4]	[5 - 57]
(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)	(1)
(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)	(2)
(3)	(3)	(3)	(3)	(3) TELEMETRY INLS —OR— SSP DATA IN TS	(3) TELEMETRY INLS —OR— SSP DATA IN TS	(3) TELEMETRY INLS —OR— SSP DATA IN TS	(3) TELEMETRY INLS —OR— SSP DATA IN TS	(3) TEL INLS OR SSP DATA IN TS (20) ALARM	(3)	(3)	(3)	(3)
VIDEO	VIDEO	BLANK	SUB SYNC						SSP DATA	SSP DATA (19) (EOAD) VIDEO	VIDEO	VIDEO
(28)	(SOSV) (28)	(28)	(27) TM/SSP	(28)	(28)	(28)	(28)	(27) (28)	(28)	(28)	(28)	(28)

2-5
BLANK
FRAMES

LINE
SYNC
FRAME

TIME SCALE AT INTERFACE IN SDS

TIME SCALE AT INTERFACE IN RDS
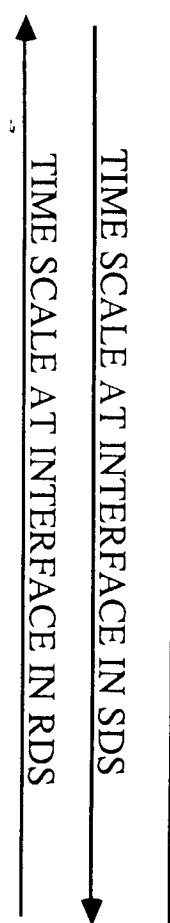
NOTES:
1. Frame number in [ ] is referenced to interface timing.
2. Word number within frame is in ( ).

FIGURE 14: SDS AND RDS LINE FORMAT

1	1	1	1	1	0	0	1	1	0	1	0	1	word 1
S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	C	B	A	word 2
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 3
						T7	T6	T5	T4	T3	T2	T1	word 4
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 5
						T7	T6	T5	T4	T3	T2	T1	word 6
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 7
						T7	T6	T5	T4	T3	T2	T1	word 8
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 9
						T7	T6	T5	T4	T3	T2	T1	word 10
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 11
						T7	T6	T5	T4	T3	T2	T1	word 12
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 13
						T7	T6	T5	T4	T3	T2	T1	word 14
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 15
						T7	T6	T5	T4	T3	T2	T1	word 16
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 17
						T7	T6	T5	T4	T3	T2	T1	word 18
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 19
						N7	N6	N5	N4	N3	N2	N1	word 20
						0	0	1	1	1	1	1	word 21
						0	1	0	0	0	0	0	word 22
						0	0	1	1	1	1	1	word 23
						0	1	0	0	0	0	0	word 24
						0	0	1	1	1	1	1	word 25
						0	1	0	0	0	0	0	word 26
						0	0	1	1	1	1	1	word 27
						Q5	0	0	Q4	Q3	Q2	Q1	word 28

BIT 1 (top right)   BIT 208 (bottom left)

TYPICAL 14 BIT TELEMETRY WORD

TAG BITS

A	B	C	VIDEO MODE
0	1	1	LS
1	1	1	TS

Telemetry:

T1 = MSB = Last bit in from Spacecraft

.
.

T7 = LSB = First bit in from Spacecraft

Scanner Offset:

Q1 = Sign *   *Negative numbers
Q2 = MSB = 2^2 represented as
Q3   2's complement
Q4
Q5 = LSB = 2^{-1}

NOTE: Word 20 has the Telemetry Word Count which refers to the next telemetry record to be received.

$N_1 = \begin{cases} 1, \text{Loss of data} \\ 0, \text{No loss of data} \end{cases}$

N_2 = MSB   Number of 14 bit
.   words of next
.   record to be
.   received
N_2 = LSB

NOTE COMPLEMENTED TELEMETRY BITS

Unused bits: 159, 166, 173, 180, 187, 194, 201

NOTE: Words three thru twenty contain telemetry data in the LS mode and SSP data in the TS mode

FIGURE 15: SDS AND RDS LINE SYNC FRAME FORMAT

4.1.2.3.3   SCANNER DIRECTION

Bits 5 and 6 of word 28 identify the direction of movement of the scanner with respect to the spacecraft +Z axis. Since the alternating scan direction is removed in the satellite memory, these two bits are always 00. (i.e., scanner rotation is always from +Z axis towards the -Z axis.)

4.1.2.4   BLANK FRAME FORMAT

Blank frames occur during the overscan period of the scanner, when video is not being formatted. There is a variable number of blank frames between the last video frame received and the sub-sync frame. The format for blank frames is shown in Figure 16.

4.1.2.5   Reserved

4.1.2.6   SUB-SYNC FRAME FORMAT

Before the Start of Smoothed Video (SOSV), which is the last video received at the interface in SDS and the first video received at the interface in RDS, there are a variable number of blank frames. Immediately subsequent to these blank frames is a sub-sync frame. This frame is shown in Figure 18 and contains the following data, all of which applies to the video line that has just been received:

1	1	1	1	1	0	0	1	1	0	1	0	1	word 1
S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	C	B	A	word 2
						0	0	0	0	1	1	1	word 3
						0	0	0	0	1	1	1	word 4
						0	0	0	0	1	1	1	word 5
						0	0	0	0	1	1	1	word 6
						0	0	0	0	1	1	1	word 7
						0	0	0	0	1	1	1	word 8
						0	0	0	0	1	1	1	word 9
						0	0	0	0	1	1	1	word 10
						0	0	0	0	1	1	1	word 11
						0	0	0	0	1	1	1	word 12
						0	0	0	0	1	1	1	word 13
						0	0	0	0	1	1	1	word 14
						0	0	0	0	1	1	1	word 15
						0	0	0	0	1	1	1	word 16
						0	0	0	0	1	1	1	word 17
						0	0	0	0	1	1	1	word 18
						0	0	0	0	1	1	1	word 19
						0	0	0	0	1	1	1	word 20
						0	0	0	0	1	1	1	word 21
						0	0	0	0	1	1	1	word 22
						0	0	0	0	1	1	1	word 23
						0	0	0	0	1	1	1	word 24
						0	0	0	0	1	1	1	word 25
						0	0	0	0	1	1	1	word 26
						0	0	0	0	1	1	1	word 27
						0	0	0	0	1	1	1	word 28

BIT 1

BIT 208

FIGURE 16: SDS AND RDS BLANK FRAME FORMAT

Scanner Offset:
$Q1$ = Sign*
$Q2$ = MSB – 2^2
↓
$Q6$ = LSB – 2^{-2}

*Negative numbers represented as 2's complement

Scan Direction – R – 0
U – Predominent Scan direction in video
Time code:
$E1$ = MSB – 2^{16} sec.
:
$E27$ – LSB – 2^{-10} sec.
Gain Code:
$G1$ = MSB – 32 db
:
$G9$ = LSB – .125 DB
$M1$ – Lin/Log (0 – Lin, 1 – Log)
$M2$-$M4$ – Sub Mode
Hot T Cal:
$H0$ = Segment ID (1–LEFT, 0 – RIGHT)
$H1$ = MSB – 2.500 Volts **
:
$H8$ = LSB – 0.020 Volts **
Cold T Cal:
$C0$ = Segment ID (1 – LEFT, 0 – RIGHT)
$C1$ = MSB – 2.500 Volts **
:
$C8$ = LSB – 0.020 Volts **
Location Data – Z1-Z32
PMT Cal:
$P1$ = MSB – 2.500 Volts **
· :
$P8$ = LSB – 0.020 Volts **
Vehicle Identity:
$I1$ = MSB – 2^3
:
$I4$ – LSB – 2^0
T Channel Gain: S – Spare Bits
$C0$ = Segment ID (1 – Left, 0 – Right)

**as formatted by OLS on Satellite

OLS 8-10:   OLS 7,11-16:
$Y1$ = MSB – 1.28 db $Y1$ – MSB – 1.85 db
:   :
$Y4$ – LSB – .16 db $Y4$ – LSB – .23 db

S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	C	B	A	
1	1	1	1	1	0	0	1	1	0	1	0	1	word 1
S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	C	B	A	word 2
						0	1	0	0	0	0	0	word 3
						0	0	1	1	1	1	1	word 4
						0	1	0	0	0	0	0	word 5
						0	0	1	1	1	1	1	word 6
						0	1	0	0	0	0	0	word 7
						0	0	1	1	1	1	1	word 8
						0	1	0	0	0	0	0	word 9
						Q5	0	0	Q4	Q3	Q2	Q1	word 10
						0	E3	E2	E1	0	0	Q6	word 11
						0	E9	E8	E7	E6	E5	E4	word 12
						0	E15	E14	E13	E12	E11	E10	word 13
						0	E21	E20	E19	E18	E17	E16	word 14
						0	E27	E26	E25	E24	E23	E22	word 15
						S	G6	G5	G4	G3	G2	G1	word 16
						S	M3	M2	M1	G9	G8	G7	word 17
						P5	P4	P3	P2	P1	U	M4	word 18
						I4	I3	I2	I1	P8	P7	P6	word 19
						H5	H4	H3	H2	H1	H0	S	word 20
						Y4	Y3	Y2	Y1	H8	H7	H6	word 21
						C5	C4	C3	C2	C1	C0	S	word 22
						Z4	Z3	Z2	Z1	C8	C7	C6	word 23
						Z11	Z10	Z9	Z8	Z7	Z6	Z5	word 24
						Z18	Z17	Z16	Z15	Z14	Z13	Z12	word 25
						Z25	Z24	Z23	Z22	Z21	Z20	Z19	word 26
						Z32	Z31	Z30	Z29	Z28	Z27	Z26	word 27
						S/T7	S/T6	S/T5	S/T4	S/T3	S/T2	S/T1	word 28

BIT 1 (top right)
BIT 208 (bottom)

T1 IS THE FIRST TELEMETRY BIT RECEIVED

S/T1 – S/T7: Telemetry Data in LS Data Lines
Special Data in TS Data Lines

UNUSED BITS:
33, 40, 47, 54,
61, 68, 75, 84,
85, 89, 96, 103,
110, 117

FIGURE 18: SDS AND RDS SUB-SYNC FRAME FORMAT (OLS 7-16)

821sc7 wp/8

1	1	1	1	1	0	0	1	1	0	1	0	1	word 1
S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	C	B	A	word 2
						0	1	0	0	0	0	0	word 3
						0	0	1	1	1	1	1	word 4
						0	1	0	0	0	0	0	word 5
						0	0	1	1	1	1	1	word 6
						0	1	0	0	0	0	0	word 7
						0	0	1	1	1	1	1	word 8
						0	1	0	0	0	0	0	word 9
						Q5	0	0	Q4	Q3	Q2	Q1	word 10
						0	E3	E2	E1	0	0	Q6	word 11
						0	E9	E8	E7	E6	E5	E4	word 12
						0	E15	E14	E13	E12	E11	E10	word 13
						0	E21	E20	E19	E18	E17	E16	word 14
						0	E27	E26	E25	E24	E23	E22	word 15
						S	G6	G5	G4	G3	G2	G1	word 16
						S	M3	M2	M1	G9	G8	G7	word 17
						P5	P4	P3	P2	P1	U	M4	word 18
						I4	I3	I2	I1	P8	P7	P6	word 19
						H5	H4	H3	H2	H1	H0	S	word 20
						Y4	Y3	Y2	Y1	H8	H7	H6	word 21
						C5	C4	C3	C2	C1	C0	S	word 22
						Z4	Z3	Z2	Z1	C8	C7	C6	word 23
						Z11	Z10	Z9	Z8	Z7	Z6	Z5	word 24
						Z18	Z17	Z16	Z15	Z14	Z13	Z12	word 25
						Z25	Z24	Z23	Z22	Z21	Z20	Z19	word 26
						Z32	Z31	Z30	Z29	Z28	Z27	Z26	word 27
						S/T7	S/T6	S/T5	S/T4	S/T3	S/T2	S/T1	word 28

BIT 1

BIT 208

Scanner Offset:
$Q1$ = Sign*
$Q2$ = MSB = 2^2
↓
$Q6$ = LSB = 2^{-2}

*Negative numbers represented as 2's complement

Scan Direction = R = 0
U = Predominent Scan direction in video
Time code:
$E1$ = MSB = 2^{16} sec.
:
$E27$ = LSB = 2^{-10} sec.
Gain Code:
$G1$ = MSB = 32 db
:
$G9$ = LSB = .125 DB
$M1$ = Lin/Log (0 = lin, 1 = log)
$M2$-$M4$ = Sub Mode
Hot T Cal:
$H0$ = Segment ID (1=LEFT, 0 = RIGHT)
$H1$ = MSB = 2.500 Volts **
:
$H8$ = LSB = 0.020 Volts **
Cold T Cal:
$C0$ = Segment ID (1 = LEFT, 0 = RIGHT)
$C1$ = MSB = 2.500 Volts **
:
$C8$ = LSB = 0.020 Volts **
Location Data = Z1-Z32
PMT Cal:
$P1$ = MSB = 2.500 Volts **
:
$P8$ = LSB = 0.020 Volts **
Vehicle Idnetity
$I1$ = MSB = 2^3
:
$I4$ = LSB = 20
T Channel Gain: S = Spare Bits
$C0$ = Segment ID (1 = Left, 0 = Right)
$Y1$ = MSB = 1.28 db
:
$Y4$ = LSB = .16 db

S/T1 - S/T7: Telemetry Data in LS Data Lines
Special Data in TS Data Lines

**As formatted by
OLS on Satellite

UNUSED BITS:
33, 40, 47, 54,
61, 68, 75, 84,
85, 89, 96, 103,
110, 117

T1 IS THE FIRST
TELEMETRY BIT
RECEIVED

FIGURE 18: SDS AND RDS SUB-SYNC FRAME FORMAT

4.1.2.6.1   ALARM CODES

(1)   000001 as received (1 = LSB of video word)

_ This alarm code is formatted in words 3, 5, 7, and
9. Refer to Figure 18 for the location of alarm code words.

(2)   111110 as received (0 = LSB of video word)

This alarm code is formatted in word 4, 6, and 8.
Refer to Figure 18 for location of alarm code words.

4.1.2.6.2   SCANNER OFFSET WORD

The scanner offset word is a 6 bit number encoded in 2's
complement code which identifies the angle between the center of scan
and the sensor +X axis. The least significant bit of the scanner
offset word is 2^{-2} units of value .99 milliradians, which is .25
milliradians. Referring to Figure 18, if Q1 is a zero, indicating
positive offset, and Q2Q3Q4Q5Q6 is some nonzero value then the center
of scan is in the +X, -Z quadrant. If Q1 is a one, indicating negative
offset, then the center of scan is in the +X, +Z quadrant.

In the locked encoder simulator mode the scanner offset
may change every other scan line and may be non integer.

In the normal encoder mode the scanner offset may change
once every 2048 scan lines only when permitted by ground command and
must be integer.

The encoder mode is indicated in the OLS equipment status
telemetry.

4.1.2.6.3   SCANNER DIRECTION

The 5th and 6th bits of word 10 identify the direction of
movement of the scanner with respect to the spacecraft +Z axis. Since
the alternating scan direction is removed in the satellite memory,
these two bits are always 00. (i.e., the data is as if the actual
scanner rotation were from the +Z axis toward the -Z axis). The 2nd
bit of word 18 indicates the predominant direction of scanner rotation
for the 5 scan lines during which the video in the SDS line was being
sampled.
The bit is encoded as follows:

ZERO = Predominent actual scanner rotation from the +Z axis towards the
       -Z axis.

ONE = Predominent actual scanner rotation from the -Z axis towards the
       +Z axis.

4.1.2.6.4   TIME CODE

Words 11 through 15 define a 27 bit time code. The
code is a pure binary number with the least significant bit equal to
1/1024 second. The time code, as inserted into the sub-sync frame,

references the nadir crossing (of the fifth scan of the five scans that are averaged together to produce a single SDS/RDS line) to an elapsed time counter. The elapsed time counter (which is updated approximately once daily) is a spacecraft clock which provides the reference to spacecraft position and hence gives the ground reference of the data taken at the center of scan of the sensor.

4.1.2.6.5   GAIN CODE

Words 16, 17, and 18 contain a 9 bit gain code plus 4 bits to identify the sub-mode being used. Refer to Figure 18 for the location of the gain code. The gain code gives the necessary information required to determine the gain operating status of the visual processing for each scan. The gain value references the gain value for the first sample of actual video of the fifth scan of the five scans that are averaged together to produce a single SDS/RDS line. Therefore the gain value will alternate in subsequent sub-sync frames between the gain value used for the 1st video sample of the 5th line at the +Z end and then the gain value used for the 1st video sample of the 5th line at the -Z end. If the gain mode is PGC, then the gain value is the gain for the fifth scan of the five scans that are averaged to form an SDS/RDS line. The 4 bits (M1-M4) used to identify the sub-mode are given below:

M1	Mode
0	Gain states in visual processor are linear.
1	Gain states in visual processor are logarithmic.

M2	M3	M4	Mode
0	0	0	UNUSED
0	0	1	ASGC
0	1	0	ATGC
1	0	0	PGC/HRD
1	0	1	PGC/PMT 1/9
1	1	0	PGC/PMT - LOW
1	1	1	PGC/PMT - HIGH
0	1	1	SPARE

Three modes for gain control by the processor are: Along Scan Gain Control (ASGC), Along Track Gain Control (ATGC), and Preset Gain Control (PGC). The processor is in only one mode per scan cycle. The mode is commanded from the ground and this mode is set up by the processor during the positive end of scan.

4.1.2.6.6   CALIBRATION WORDS

The remaining words contain various calibration signals. These signals are shown in Figure 18. The values for Hot T Cal, Cold T Cal, and PMT Cal are obtained during the +Z end of scan and the -Z end of scan that occur before and after the fourth scan of the five scans that are averaged together to produce a single SDS/RDS line. Location data is that complete correlated set of four words that are available at the center of the fifth scan of the five scans that are averaged.

    (1)   Hot T Cal: 8 bits resolution + 1 bit segment I.D.

The Hot T Cal value is updated during each +Z EOS (end of scan) and this value is repeated for the -Z EOS.

    (2)   Cold T Cal: 8 bits resolution + 1 bit segment I.D.

The Cold T Cal value is updated during each -Z EOS (end of scan) and this value is repeated for the +Z EOS.

The two infrared calibration (T-Cal) words provide the temperatures of the blackbody sources on the sensor. The segment I.D. bit identifies the segment of the T detector being calibrated.

(3)   Location Data:

The information contained in the 32 bits designated Z1 - Z32 in Figure 18 refers to the parameters used by ground processing to locate the satellite subpoint (longitude, latitude, cosine crossing angle) and those parameters used by the OLS to determine the Along Scan Gain Control (ASGC) mode. Figures 19 and 20 give the content of the Location data. Included with the location data is a time code (EPHCLK) which references the time of calculation of all the information of the sequence Word 1 thru Word 5 downlinked in the Z1-Z32 bits in SDS/RDS. The data will be downlinked as a correlated group in the sequence Word 5 thru Word 1. Due to the input rate of location data from the S/C to the OLS and the five scan averaging in SDS/RDS, not every group of five Location Data words transferred to the OLS will appear in the sub-sync frame.

(4)   PMT Cal: 8 bits resolution:

The PMT Cal value is updated during each -Z EOS (end of scan) and this value is repeated for the +Z EOS.

The photomultiplier calibration (PMT Cal) word provides the data from the self-calibration of the PMT on the sensor.

(5)   Vehicle Identity: 4 bits resolution.

A unique code to identify each spacecraft will be inserted into the four bits for vehicle identity.

(6)   T Channel Gain: 4 bits resolution.

The T channel gain value is variable to allow compensation for any degradation effects on-orbit since channel adjustment. The Cold T Cal segment I.D. bit identifies the segment of the T channel whose gain is indicated. The T Channel gain for one of the segments is updated at each -Z overscan alternating between the two segments at each update. The indicated segment gain in SDS or RDS is the gain in the fifth scan line (SDF data line) of the five scan lines that are averaged to obtain one SDS/RDS line.

FIGURE 19.   LOCATION DATA WORDS

WORD ONE: EPH CLOCK 13 BITS | LONGITUDE 16 BITS | 0 | 0 | 1
MSB = 2^8 SEC LSB = 2^{-4} SEC | MSB ... LSB

WORD TWO: LATITUDE 15 BITS | COSINE CROSSING ANGLE 14 BITS | 0 | 1 | 0
MSB ... LSB | MSB ... LSB

WORD THREE: COS SOLAR AZ 14 BITS | SOLAR EL 15 BITS | 0 | 1 | 1
MSB ... LSB | MSB ... LSB

WORD FOUR: H/R 14 BITS | EPH CLOCK 15 BITS | 1 | 0 | 0
MSB ... LSB | MSB = 2^{17} SEC ... LSB = 2^3 SEC

WORD FIVE: COSINE OF LUNAR AZ 8 BITS | LUNAR EL 13 BITS | LUNAR PHASE 8 BITS | 1 | 0 | 1
MSB ... LSB | MSB ... LSB | MSB ... LSB

TAG BITS(Z30-Z32)			CODE
30	31	32	
0	0	0	NO DATA
0	0	1	WORD 1
0	1	0	WORD 2
0	1	1	WORD 3
1	0	0	WORD 4
1	0	1	WORD 5
1	1	0	SPARE
1	1	1	SPARE

Paramter	Units	Sign Bit	Bit Range MSB-LSB
EPH CLK	Seconds	N/A	$2^{17} - 2^{-4}$
Longitude	π Radians	S	$2^{-1} - 2^{-15}$
Latitude	π Radians	S	$2^{-1} - 2^{-14}$
Cosine Crossing Angle	None	S	$2^{-1} - 2^{-13}$
Cosine Solar Azimuth	None	S	$2^{-1} - 2^{-13}$
Solar Elevation	Degrees	S	$2^{6} - 2^{-7}$
h/R	Earth Radii (R = 6378.145 Km)	0	$2^{-3} - 2^{-15}$
Cosine Lunar Azimuth	None	S	$2^{-1} - 2^{-7}$
Lunar Elevation	Degrees	S	$2^{6} - 2^{-5}$
Lunar Phase	Degrees	N/A	$2^{7} - 2^{0}$

S = Sign bit with negative numbers represented as 2's complement.

Figure 20. Location Data Words Content

gp/0052R

4.1.2.7   TELEMETRY FRAME FORMAT

The LS line contains slightly over 4 frames of satellite housekeeping telemetry data. Telemetry begins with the last word of the sub-sync frame (as received at the interface in SDS) and continues until the Line sync Frame (see Figure 21). Note that some telemetry bits are complemented for transition density purposes.

4.1.2.7.1   TELEMETRY RECORD

The telemetry record reconstructed from the telemetry words in the LS line is shown in Figure 22. One spacecraft telemetry word consists of 14 bits. At the end of each received telemetry record is a telemetry word count (bits N1 to N7 of word 20 of the LS Line Sync Frame, Figure 15). The word count refers to the number of valid 14 bit telemetry words contained in the next record. Valid word counts are 0-16 words. N_2 to N_7 contains the word count with the MSB in N_2. $N_1 = 1$ indicates that the telemetry data overflowed an OLS buffer and some data has been lost. When an overflow occurs, a new record is started and the N_1 bit is set to logic "1". The word count in N_2-N_7 is not affected. The word count allows ground processing to distinguish new telemetry from old data still in the OLS buffer that has not been overwritten by new telemetry at the time of telemetry transfer into the LS line.

4.1.3   RTD DATA FORMAT

4.1.3.1   FRAME FORMAT

The RTD frame format is shown in Figure 23. The frame is 150 bits long and consists of a 13 bit Frame Sync Code, 1 tag bit, 15 six bit samples of fine data, 3 eight bit samples of smoothed data, 6 transition bits, 1 eight bit word for "wow and flutter", and 1 eight bit word for TERDATS data which is implemented for insertion of the DMDM data and SPECIAL data.

1	1	1	1	1	0	0	1	1	0	1	0	1	**BIT 1** word 1
S10	S9	S8	S7	S6	S5	S4	S3	S2	S1	C	B	A	word 2
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 3
						T7	T6	T5	T4	T3	T2	T1	word 4
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 5
						T7	T6	T5	T4	T3	T2	T1	word 6
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 7
						T7	T6	T5	T4	T3	T2	T1	word 8
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 9
						T7	T6	T5	T4	T3	T2	T1	word 10
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 11
						T7	T6	T5	T4	T3	T2	T1	word 12
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 13
						T7	T6	T5	T4	T3	T2	T1	word 14
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 15
						T7	T6	T5	T4	T3	T2	T1	word 16
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 17
						T7	T6	T5	T4	T3	T2	T1	word 18
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 19
						T7	T6	T5	T4	T3	T2	T1	word 20
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 21
						T7	T6	T5	T4	T3	T2	T1	word 22
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 23
						T7	T6	T5	T4	T3	T2	T1	word 24
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 25
						T7	T6	T5	T4	T3	T2	T1	word 26
						$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	word 27
						T7	T6	T5	T4	T3	T2	T1	BIT 208 word 28

Telemetry:
  T1 = MSB = Last bit in from Spacecraft
  .
  .
  T7 = LSB = First bit in from Spacecraft

NOTE COMPLEMENTED TELEMETRY BITS

TYPCIAL 14 BIT TELEMETRY WORD

FIGURE 21: SDS AND RDS TELEMETRY FRAME FORMAT

TELEMETRY DATA AS RECEIVED AT INTERFACE IN SDS

TELEMETRY DATA AS RECEIVED AT INTERFACE IN RDS

V

TELEMETRY WORD COUNT OF RECORD N-1 ⟶

VALID DATA

WORD 1 ⟶
WORD 2 ⟶
.
.
.
WORD X ⟶
WORD X+1 ⟶
WORD 61 ⟶

N7	N6	N5	N4	N3	N2	N1	R
$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	E
T7	T6	T5	T4	T3	T2	T1	C

O
R
D
N

OLD DATA

TELEMETRY WORD COUNT OF RECORD N. (X 14-BIT WORDS) ⟶

VALID DATA

WORD 1 ⟶
TYPICAL 14 ⟶ BIT TELEMETRY WORD SHOWING COMPLEMENTED BITS

WORD 61 ⟶

N7	N6	N5	N4	N3	N2	N1	R
$\overline{T7}$	T6	$\overline{T5}$	T4	T3	$\overline{T2}$	$\overline{T1}$	E
T7	T6	T5	T4	T3	T2	T1	C

O
R
D
N+1

| $\overline{T7}$ | T6 | $\overline{T5}$ | T4 | T3 | $\overline{T2}$ | $\overline{T1}$ |
| T7 | T6 | T5 | T4 | T3 | T2 | T1 | ⟵ |

LAST TELEMETRY BIT RECEIVED AT INTERFACE IN RDS

1ST TELEMETRY BIT BIT RECEIVED AT INTERFACE IN SDS

$N_1 = \begin{cases} 1, \text{ LOSS OF DATA} \\ 0, \text{ NO LOSS OF DATA} \end{cases}$

N_2 = MSB
.
.
.
N_7 = LSB

(# OF 14 BIT WORDS OF NEXT RECORD TO BE RECEIVED)

T1 = MSB = LAST BIT IN FROM S/C

$\overline{?}$ = LSB = FIRST BIT IN FROM S/C

NOTE: ALL TELEMETRY WORDS ARE 14 BITS LONG

FIGURE 22: TELEMETRY RECORD

BIT 1

Z	1	1	1	1	1	1	1	0	0	1	1	0	1	0	1	Word 1
					S2	S1	F6	F5	F4	F3	F2	F1				Word 2

Table (Words 2–18):

col A	col B	F6	F5	F4	F3	F2	F1	Word
S2	S1	F6	F5	F4	F3	F2	F1	Word 2
S4	S3	F6	F5	F4	F3	F2	F1	Word 3
S6	S5	F6	F5	F4	F3	F2	F1	Word 4
S8	S7	F6	F5	F4	F3	F2	F1	Word 5
T2	T2	F6	F5	F4	F3	F2	F1	Word 6
S2	S1	F6	F5	F4	F3	F2	F1	Word 7
S4	S3	F6	F5	F4	F3	F2	F1	Word 8
S6	S5	F6	F5	F4	F3	F2	F1	Word 9
S8	S7	F6	F5	F4	F3	F2	F1	Word 10
T2	T2	F6	F5	F4	F3	F2	F1	Word 11
S2	S1	F6	F5	F4	F3	F2	F1	Word 12
S4	S3	F6	F5	F4	F3	F2	F1	Word 13
S6	S5	F6	F5	F4	F3	F2	F1	Word 14
S8	S7	F6	F5	F4	F3	F2	F1	Word 15
T2	T2	F6	F5	F4	F3	F2	F1	Word 16
W8	W7	W6	W5	W4	W3	W2	W1	Word 17
K2	K1	J6	J5	J4	J3	J2	J1	Word 18

BIT 150

TAG BIT   VIDEO

Z	F1-F6	S1-S8
0	LF	TS
1	TF	LS

TRANSITION BITS:

T2=COMPLEMENT OF PRECEDING F6 BIT

FINE DATA:
 F1=MSB = 2.500 volts
 .

 .
 F6=LSB = .078 volts

SMOOTHED DATA:
 S1=MSB = 2.500 volts
 .

 .
 S8=LSB = .019 volts

"WOW/FLUTTER":
 W1=MSB = 2^7

 .

 .
 W8=LSB = 2^0

TERDATS DATA TYPE

K1	K2	DATA
0	0	NO DATA
0	1	DM DM
1	0	SSP DATA
1	1	UNUSED

TERDATS DATA:
 J1=MSB
 .
 .
 .
 J6=LSB
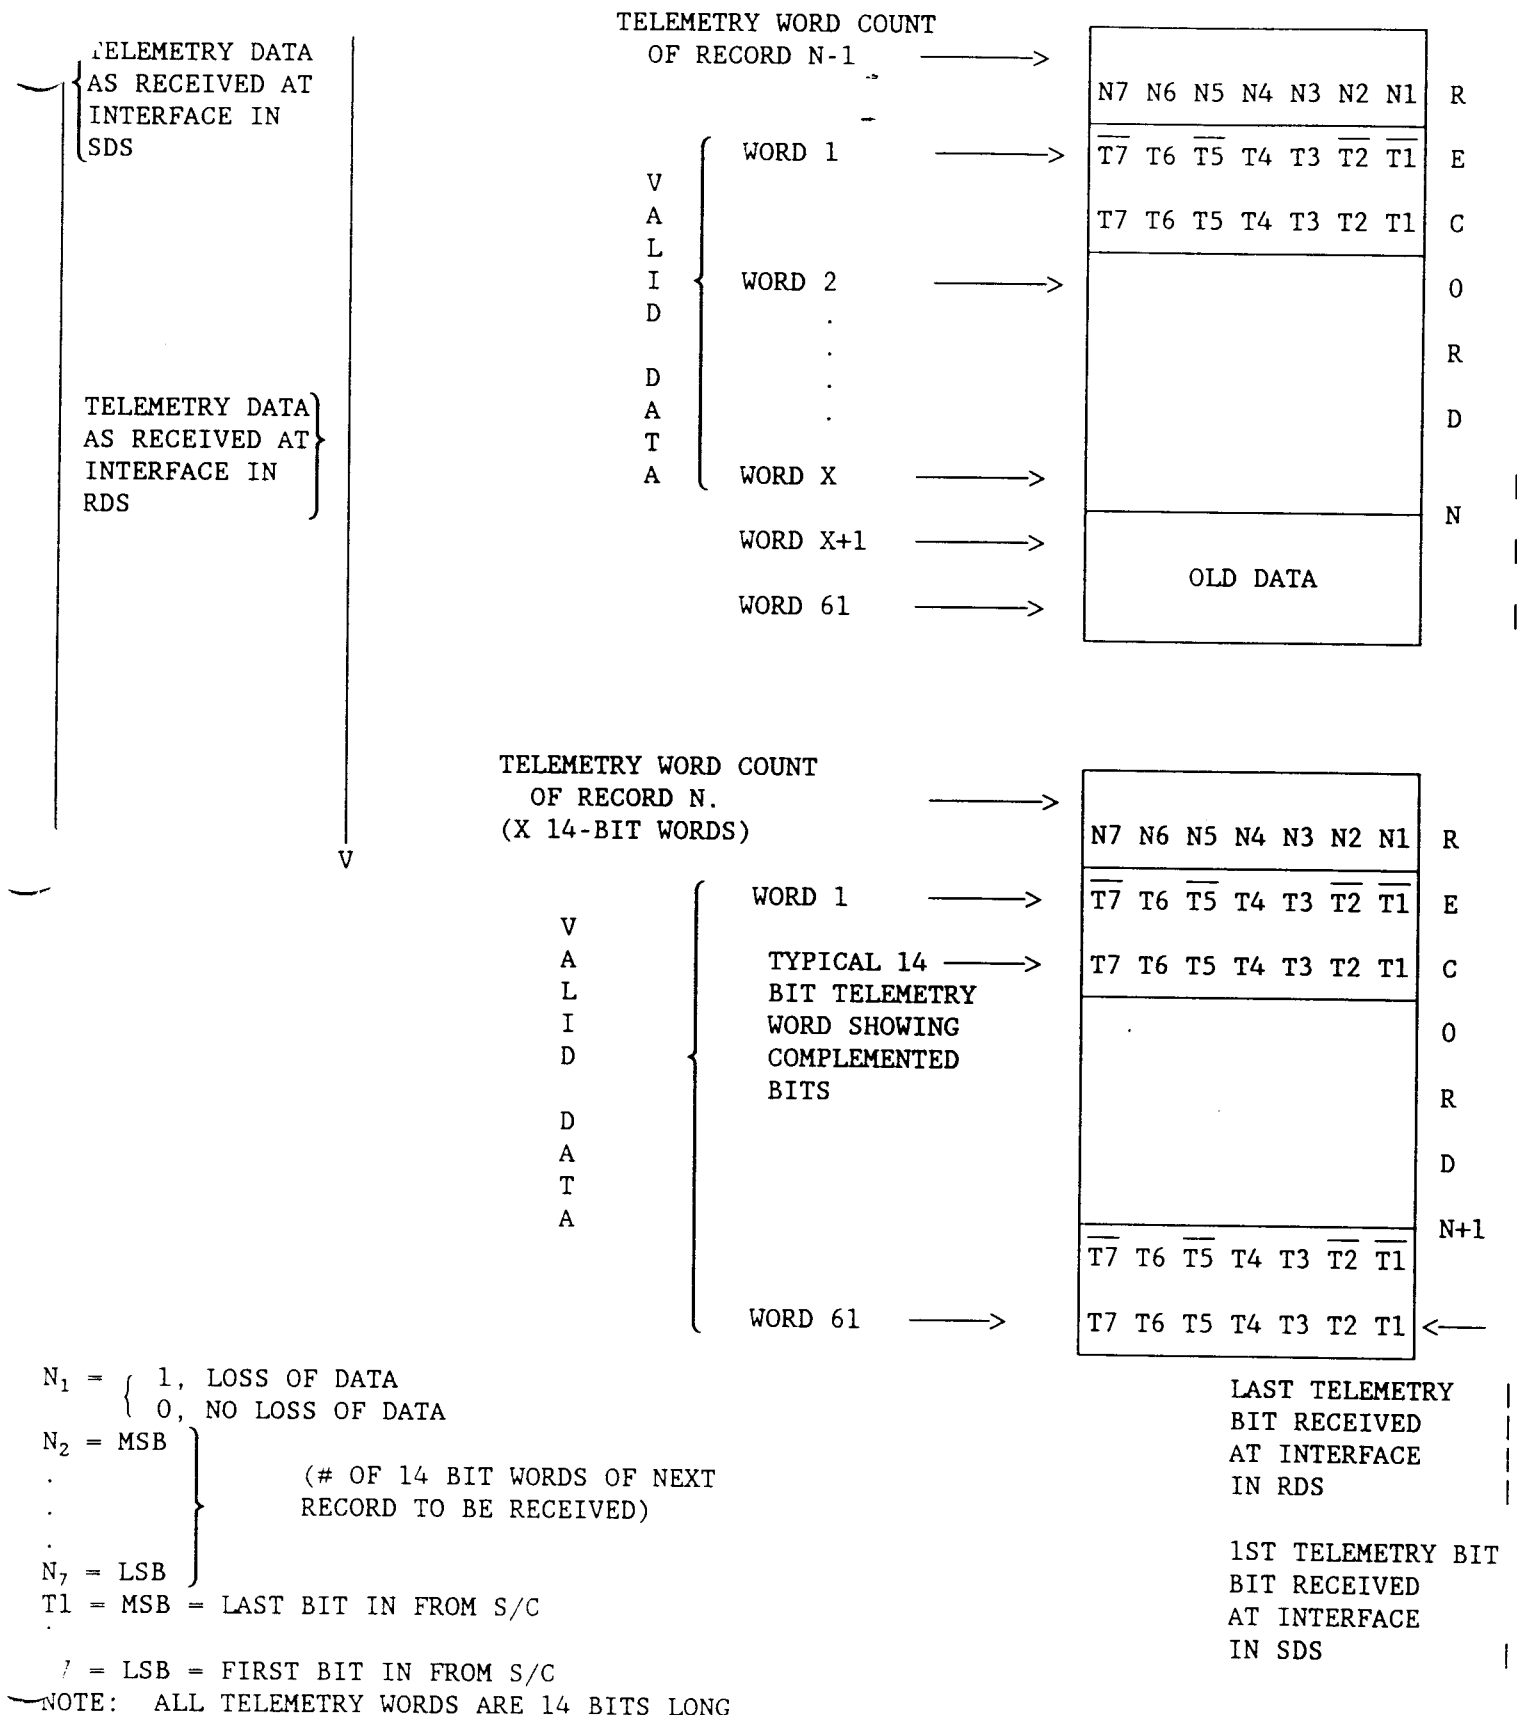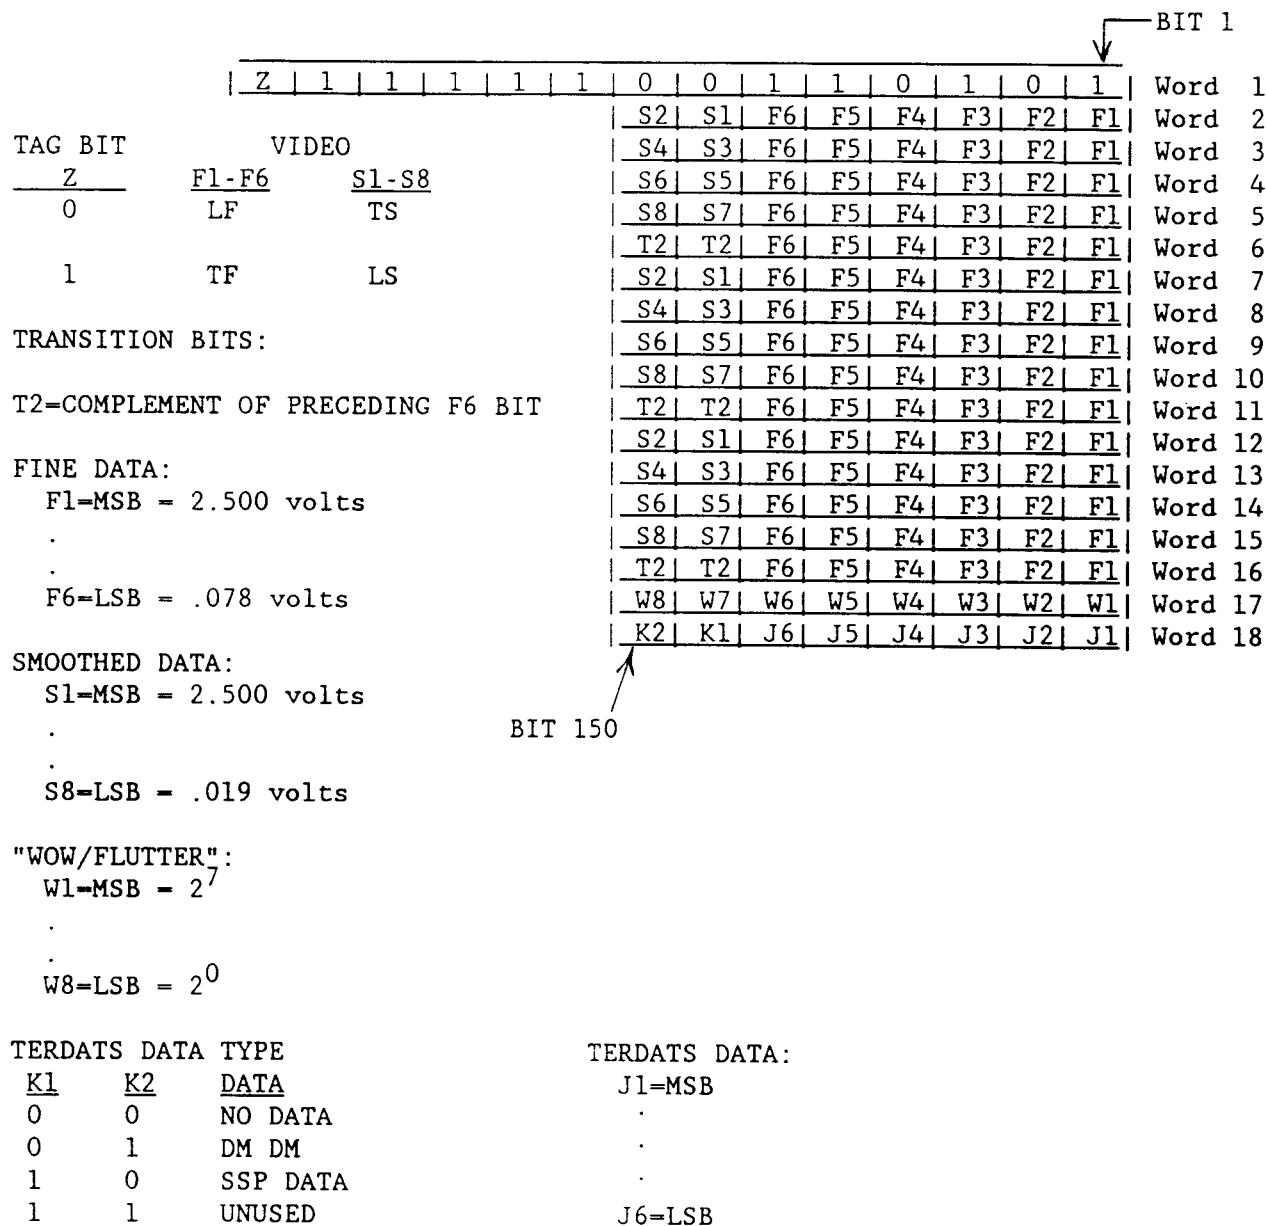
FIGURE 23: RTD FRAME FORMAT

r/2564M

4.1.3.1.1   FRAME SYNC CODE

The first 13 bits of each frame consist of a frame sync code. This code is 1010110011111 where the leftmost bit is that received first at the interface.

4.1.3.1.2   TAG BIT

The bit immediately after the last bit of the frame sync code is the tag bit (see Figure 23 bit Z). This bit identifies the fine and smoothed combination of video in the frame. Video type is as follows:

Tag Bit	Video
0	15 six bit samples of LF 3 eight bit samples of TS
1	15 six bit samples of TF 3 eight bit samples of LS

4.1.3.1.3   VIDEO

The frame contains 15 fine video words, either LF or TF, and 3 smoothed video words similar to TS or LS. The fine video samples are of the same resolution as the SDF data. The smoothed video samples are derived from the fine video using only analog filtering. Thus the smoothed data resolution in the RTD mode is nominally .3 nm along track and 1.5 nm across track (along scan). Each fine sample is digitized to a 6 bit resolution. The most significant bit (MSB) of each fine sample is that bit received first at the interface (e.g., bit 15, 23, 31, . . .). Each smoothed sample is digitized to an 8 bit resolution. The most significant bit (MSB) of each smoothed sample is that bit received first at the interface (e.g., bit 21, 61, and 101). In order to guarantee a high average transition density, transition bits (T2) are incorporated within the frame structure. The T2 bits (bits 53 and 54; 93 and 94; and 133 and 134) are the complement of the preceding F6 bit. The RTD line contains 1452-1500 samples of smoothed data and 7260-7500 samples of fine data.

r/2564M

4.1.3.1.4   RELATIONSHIP OF VIDEO TO FRAME

In the RTD mode, the data is processed and transmitted to the ground as it is generated (i.e., in real time). Note that in the stored modes the same data is buffered and the relationships between the Line Sync Frame and the first video sample are fixed. In the RTD mode, in order to position the video samples accurately, a known reference is provided. In both the Line Sync and Sub-Sync frames a code is inserted to identify the bit in the previous frame at which time coincidence occurred with the start (end) of active video at $\pm$ 56.41° on the scanner, relative to nadir.

4.1.3.1.5   PHASE RELATIONSHIP OF VIDEO TO FRAME

In order to re-constitute the video signal with the proper phase relationship to the Line Sync pulse, the sampling delays of each fine and smoothed sample are given in Figure 24.

4.1.3.1.6   SCANNER DIRECTION

Since RTD data is not stored on a recorder the data is received in the same sequence of alternating directions as the data is produced. Note that the RTD formatter on the satellite arranges the frame bit pattern such that the frame sync code is received exactly as in the stored modes.

r /2564M

4.1.3.1.7   SCAN ANGLE OF VIDEO DATA SAMPLES

The RTD video data is not corrected in the OLS so that data samples do not correspond to fixed scan angles. The data sampling occurs at a varying sampling frequency of nominally 102.4 kHz. Ground correction of video data sample placement to eliminate the effects of scanner motion deviations from nominal is possible using the wow flutter information. (See paragraph 4.1.3.6). The wow flutter clock frequency is deviated from its 6023.53 Hz as a direct function of scanner motion deviation from a nominal sine wave of frequency 5.94 Hz and amplitude 57.85 degrees.

The scan angle ($\emptyset$) for sample number (S_i) is defined as follows:

$$\emptyset = (-1)^D * \emptyset_p * \cos (W*M+B) - N*K$$

where:

D = 0 for RTD DOS 0
    1 for RTD DOS 1

$\emptyset_p$ = peak scan angle = 57.85° = 1.00967 radians |

W = number of wow-flutter periods (including fractional periods) between line sync and the video data sample of interest.

M = 0.0061961 radians |

B = 0.22310 radians for fine data |
    = 0.22104 radians for smoothed data |

N = signed value of scanner offset, in units of value K, from |
    subsync frame of data stream. (See paragraph 4.1.3.3.3 and
    paragraph 4.1.3.5.3).

K = 0.00099 radians |

4.1.3.2   RTD LINE FORMAT

The RTD line format is shown in Figure 25.

4.1.3.3   LINE SYNC FRAME FORMAT

The Line Sync Frame format is shown in Figure 26. When the scanner passes through $\pm$ 56.41° towards nadir, the OLS stores the bit number (1-150) of the frame being transmitted. This frame is identified as Frame 1 in Figure 25. When the next frame is formatted words 2-13 contain 12 Alarm codes as follows:

r/2564M

FIGURE 24A: PHASE RELATIONSHIP OF FINE VIDEO TO FRAME

AVE		Sample Valid	OGE
Start Sample Bit Time Rising Edge		Sample Valid Bit Time Falling edge	Sample Received Bit Time
Frame N-1	1	3	Frame N 15
	11	13	23
	21	23	31
	31	33	39
	41	43	47
	51	53	55
	61	63	63
	71	73	71
	81	83	79
	91	93	87
	101	103	95
	111	113	103
	121	123	111
	131	133	119
Frame N-1	141	143	Frame N 127
Frame N	1	3	Frame N + 1 15

FIGURE 24B: PHASE RELATIONSHIP OF SMOOTHED VIDEO TO FRAME

AVE			OGE
Start Sample Bit Time Rising Edge		Sample Valid Bit Time Falling edge	Sample Received Bit Time
Frame N-1	3	8	Frame N 45
N-1	53	58	N 85
N-1	103	108	N 125
N	3	8	Frame N + 1 45

FIGURE 24:   PHASE RELATIONSHIPS OF VIDEO TO FRAME

r/2564M

[490]	[491]	[492]	[493]							[1]	[2]	[3]	[4]	[5-489]
				(1)	(1)					(1)	(1)	(1)		
VIDEO	VIDEO	VIDEO	VIDEO	(2) VIDEO (16)	(2) ALARM (13) (14) (16)	BLANK	BLANK	BLANK	(2) BLANK (16)	(2) ALARM (13) (14) (16)	(2) VIDEO (16)	VIDEO	VIDEO
				(17)	(17)				(17)	(17)	(17)		
				(18)	(18)				(18)	(18)	(18)		

1 or 2 VIDEO FRAMES   SUB-SYNC FRAME |← 79 or 80 BLANK FRAMES NOMINALLY →| LINE SYNC FRAME
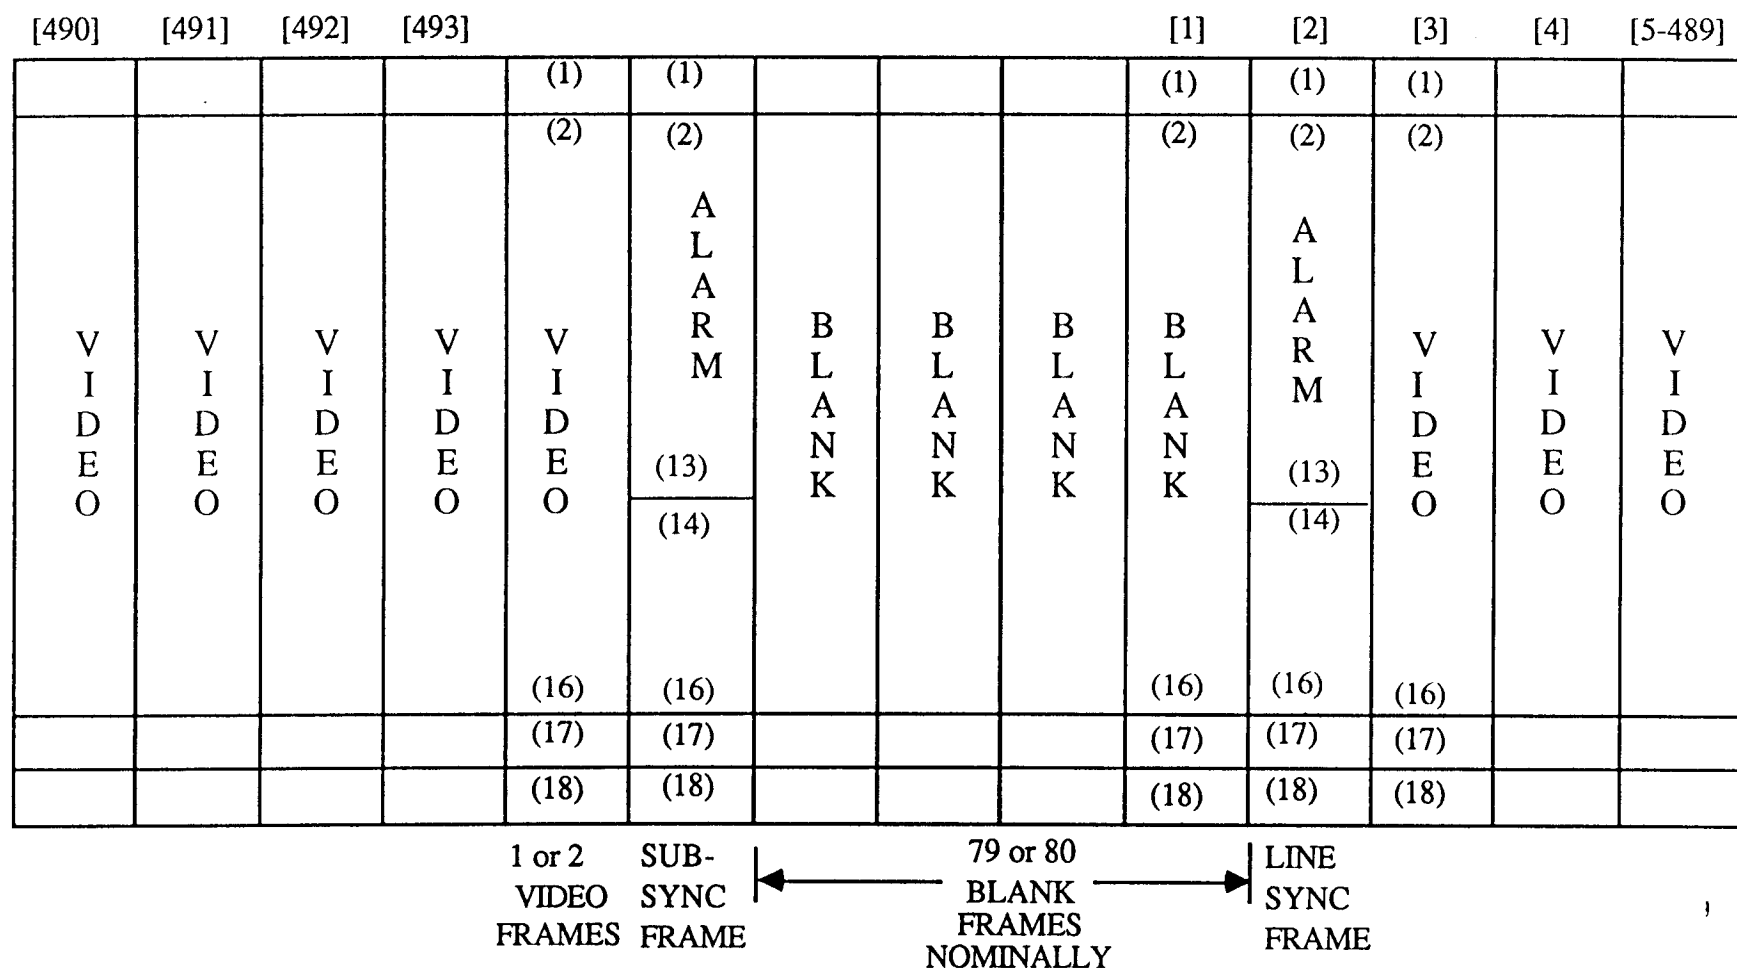
NOTES:

1. Frame number in [ ] is referenced to interface timing.

2. Word number within frame is in ( ).

3. This figure represents the nominal line format. Due to 1% frequency deviation (from 5.94 Hz) and maximum amplitude deviation (from 57.85°) of the scanner motion, the total number of blank frames can range from 77 to 84. The total number of video frames can range from 484 to 500. The total number of frames can range from 568 to 581.

FIGURE 25 : RTD LINE FORMAT

BIT 1 →

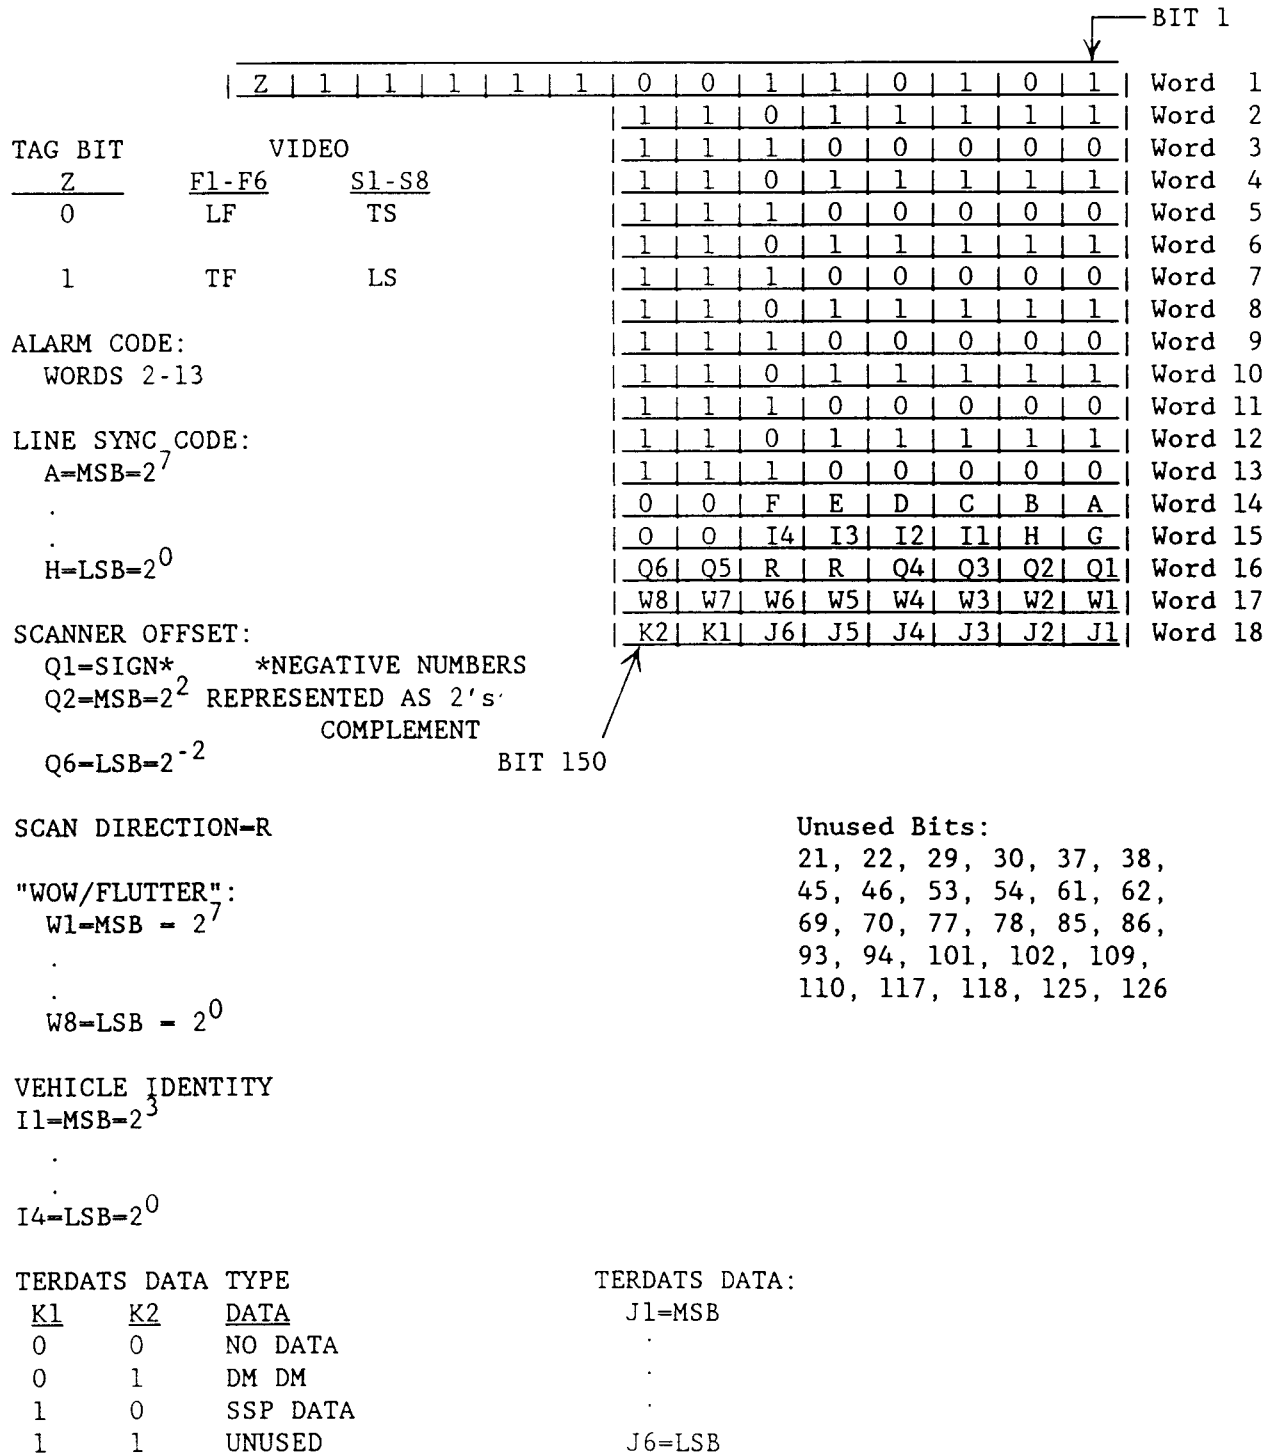|																	
Z	1	1	1	1	1	1	1	0	0	1	1	0	1	0	1	Word 1
								1	1	0	1	1	1	1	1	Word 2
								1	1	1	0	0	0	0	0	Word 3
								1	1	0	1	1	1	1	1	Word 4
								1	1	1	0	0	0	0	0	Word 5
								1	1	0	1	1	1	1	1	Word 6
								1	1	1	0	0	0	0	0	Word 7
								1	1	0	1	1	1	1	1	Word 8
								1	1	1	0	0	0	0	0	Word 9
								1	1	0	1	1	1	1	1	Word 10
								1	1	1	0	0	0	0	0	Word 11
								1	1	0	1	1	1	1	1	Word 12
								1	1	1	0	0	0	0	0	Word 13
								0	0	F	E	D	C	B	A	Word 14
								0	0	I4	I3	I2	I1	H	G	Word 15
								Q6	Q5	R	R	Q4	Q3	Q2	Q1	Word 16
								W8	W7	W6	W5	W4	W3	W2	W1	Word 17
								K2	K1	J6	J5	J4	J3	J2	J1	Word 18

TAG BIT	VIDEO	
Z	F1-F6	S1-S8
0	LF	TS
1	TF	LS

ALARM CODE:
  WORDS 2-13

LINE SYNC CODE:
  $A=MSB=2^7$
  .
  .
  $H=LSB=2^0$

SCANNER OFFSET:
  Q1=SIGN*   *NEGATIVE NUMBERS
  $Q2=MSB=2^2$ REPRESENTED AS 2's
                        COMPLEMENT
  $Q6=LSB=2^{-2}$ BIT 150

SCAN DIRECTION=R

"WOW/FLUTTER":
  $W1=MSB = 2^7$
  .
  .
  $W8=LSB = 2^0$

VEHICLE IDENTITY
$I1=MSB=2^3$
  .
  .
$I4=LSB=2^0$

Unused Bits:
21, 22, 29, 30, 37, 38,
45, 46, 53, 54, 61, 62,
69, 70, 77, 78, 85, 86,
93, 94, 101, 102, 109,
110, 117, 118, 125, 126

TERDATS DATA TYPE		
K1	K2	DATA
0	0	NO DATA
0	1	DM DM
1	0	SSP DATA
1	1	UNUSED

TERDATS DATA:
J1=MSB
  .
  .
  .
J6=LSB

FIGURE 26: RTD LINE SYNC FRAME

r /2564M

4.1.3.3.1   ALARM CODES

        (1)   111110 (0 = LSB of code)

        This alarm code is formatted in the even-numbered words starting at word 2 and ending at word 12 (refer to Figure 26 for location of alarm codes).

        (2)   000001 (1 = LSB of code)

        This alarm code is formatted in the odd-numbered words starting at word 3 and ending at word 13 (refer to Figure 26 for location of alarm codes).

4.1.3.3.2   LINE SYNC CODE

        The Line Sync Code (A-H of words 14 and 15 Figure 26 is an 8 bit binary number which identifies the bit (1-150) of the previous frame (1) where the line sync pulse occurred. The code is received MSB first (A = MSB = 2^7, H = LSB = 2^0).

4.1.3.3.3   SCANNER OFFSET WORD

        The scanner offset word is a 6 bit number encoded in 2's complement code which identifies the angle between the center of scan and the sensor +X$_2$ axis. The least significant bit of the scanner offset word is 2^{-2} units of value .99 milliradians, which is .25 milliradians. Referring to Figure 26 if Q1 is a zero, indicating positive offset, and Q2Q3Q4Q5Q6 is some nonzero value then the center of scan is in the +X, -Z quadrant. If Q1 is a one, indicating negative offset, then the center of scan is in the +X, +Z quadrant.

        In the locked encoder simulator mode the scanner offset may change every other scan line and may be non integer.

        In the normal encoder mode the scanner offset may change once every 2048 scan lines only when permitted by ground command and must be integer.

        The encoder mode is indicated in the OLS equipment status telemetry.

4.1.3.3.4   SCANNER DIRECTION

        Bits 5 and 6 of word 16 identify the direction of the actual movement of the scanner with respect to the spacecraft Z axis. Note that the data received at the interface is in the actual scanner direction. Both bits are identical and are encoded as follows:

        ZERO = actual scanner rotation from the +Z axis towards
               the -Z axis

        ONE = actual scanner rotation from the -Z axis towards
              the +Z axis

r/2564M

4.1.3.4   BLANK FRAME FORMAT

Blank frames occur during the over scan period of the scanner when video is not being formatted between the Line Sync frame and the Sub-Sync frame. The blank frame format is shown in Figure 27.

4.1.3.5   SUB-SYNC FRAME FORMAT

The Sub-Sync frame format is shown in Figure 28. When the scanner passes through $\pm56.41°$ towards overscan, the OLS stores the bit number (1-150) of the frame being transmitted. The next frame is formatted as the sub-sync frame containing 12 Alarm codes in words 2-13 as follows:

4.1.3.5.1   ALARM CODES

(1)   000001 (1 = LSB of code)

This alarm code is formatted in the even-numbered words starting at word 2 and ending at word 12 (refer to Figure 28 for location of alarm codes).

(2)   111110 (0 = LSB of code)

This alarm code is formatted in the odd-numbered words starting at word 3 and ending at word 13 (refer to Figure 28 for location of alarm codes).

4.1.3.5.2   SUB-SYNC CODE

The Sub-Sync Code (A-H of words 14 and 15 of Figure 28 is an 8 bit binary number which identifies the bit (1-150) of the previous frame (1) where the sub-sync pulse occurred. The code is received MSB first (A = MSB = 2^7, H = LSB = 2^0).

4.1.3.5.3   SCANNER OFFSET WORD

The scanner offset word is a 6 bit number encoded in 2's complement code which identifies the angle between the center of scan and the sensor +X axis. The least significant bit of the scanner offset word is 2^{-2} units of value .99 milliradians, which is .25 milliradians. Referring to Figure 26 if Q1 is a zero, indicating positive offset, and Q2Q3Q4Q5Q6 is some nonzero value then the center of scan is in the +X, -Z quadrant. If Q1 is a one, indicating negative offset, then the center of scan is in the +X, +Z quadrant.

In the locked encoder simulator mode the scanner offset may change every other scan line and may be non integer.

In the normal encoder mode the scanner offset may change once every 2048 scan lines only when permitted by ground command and must be integer.

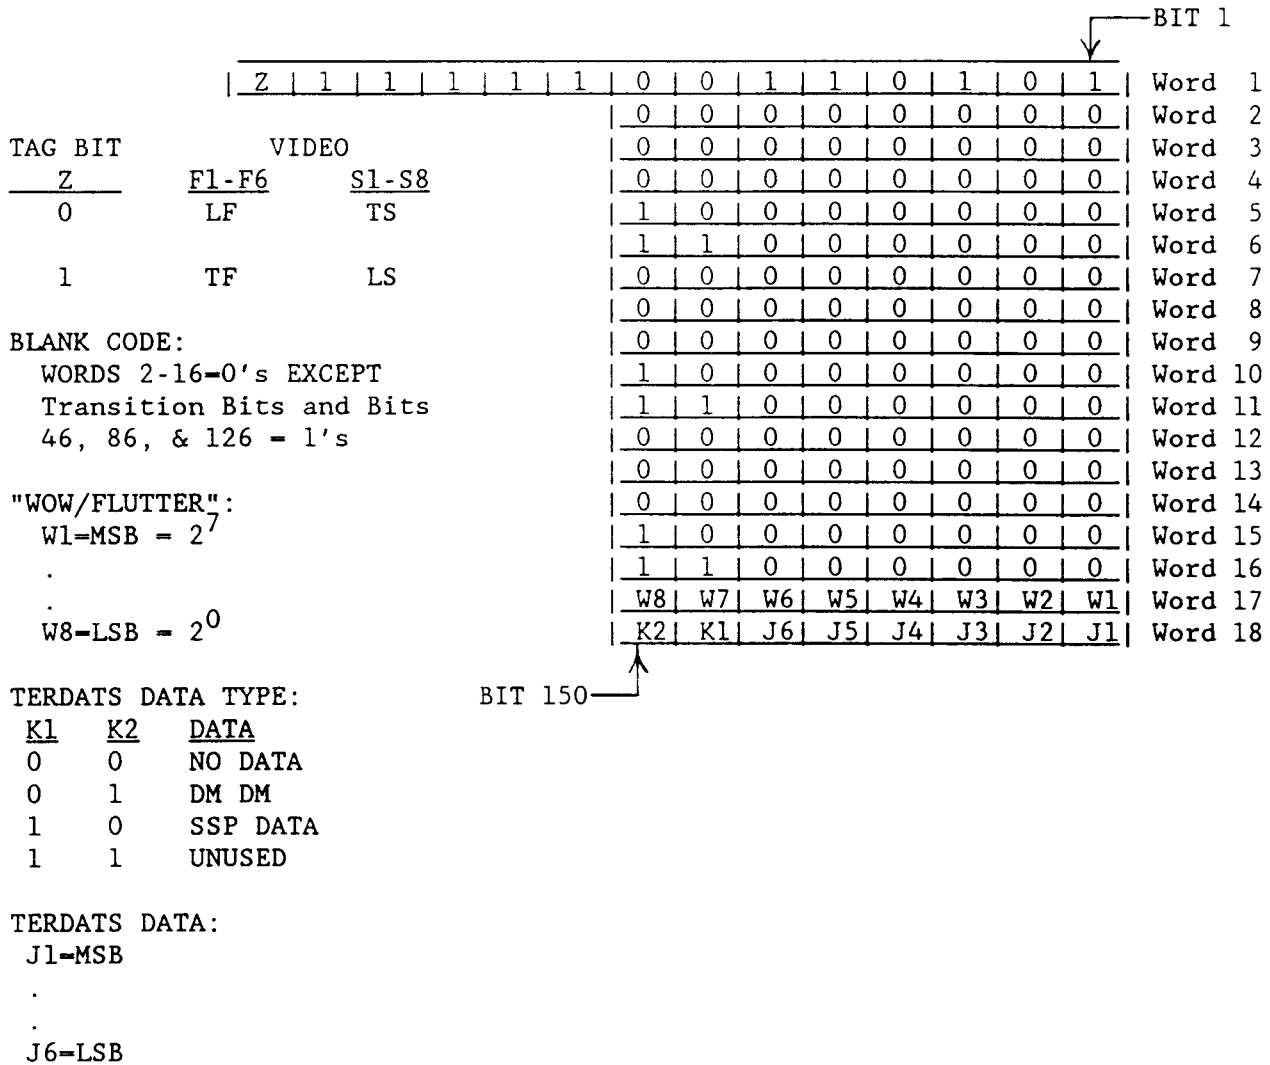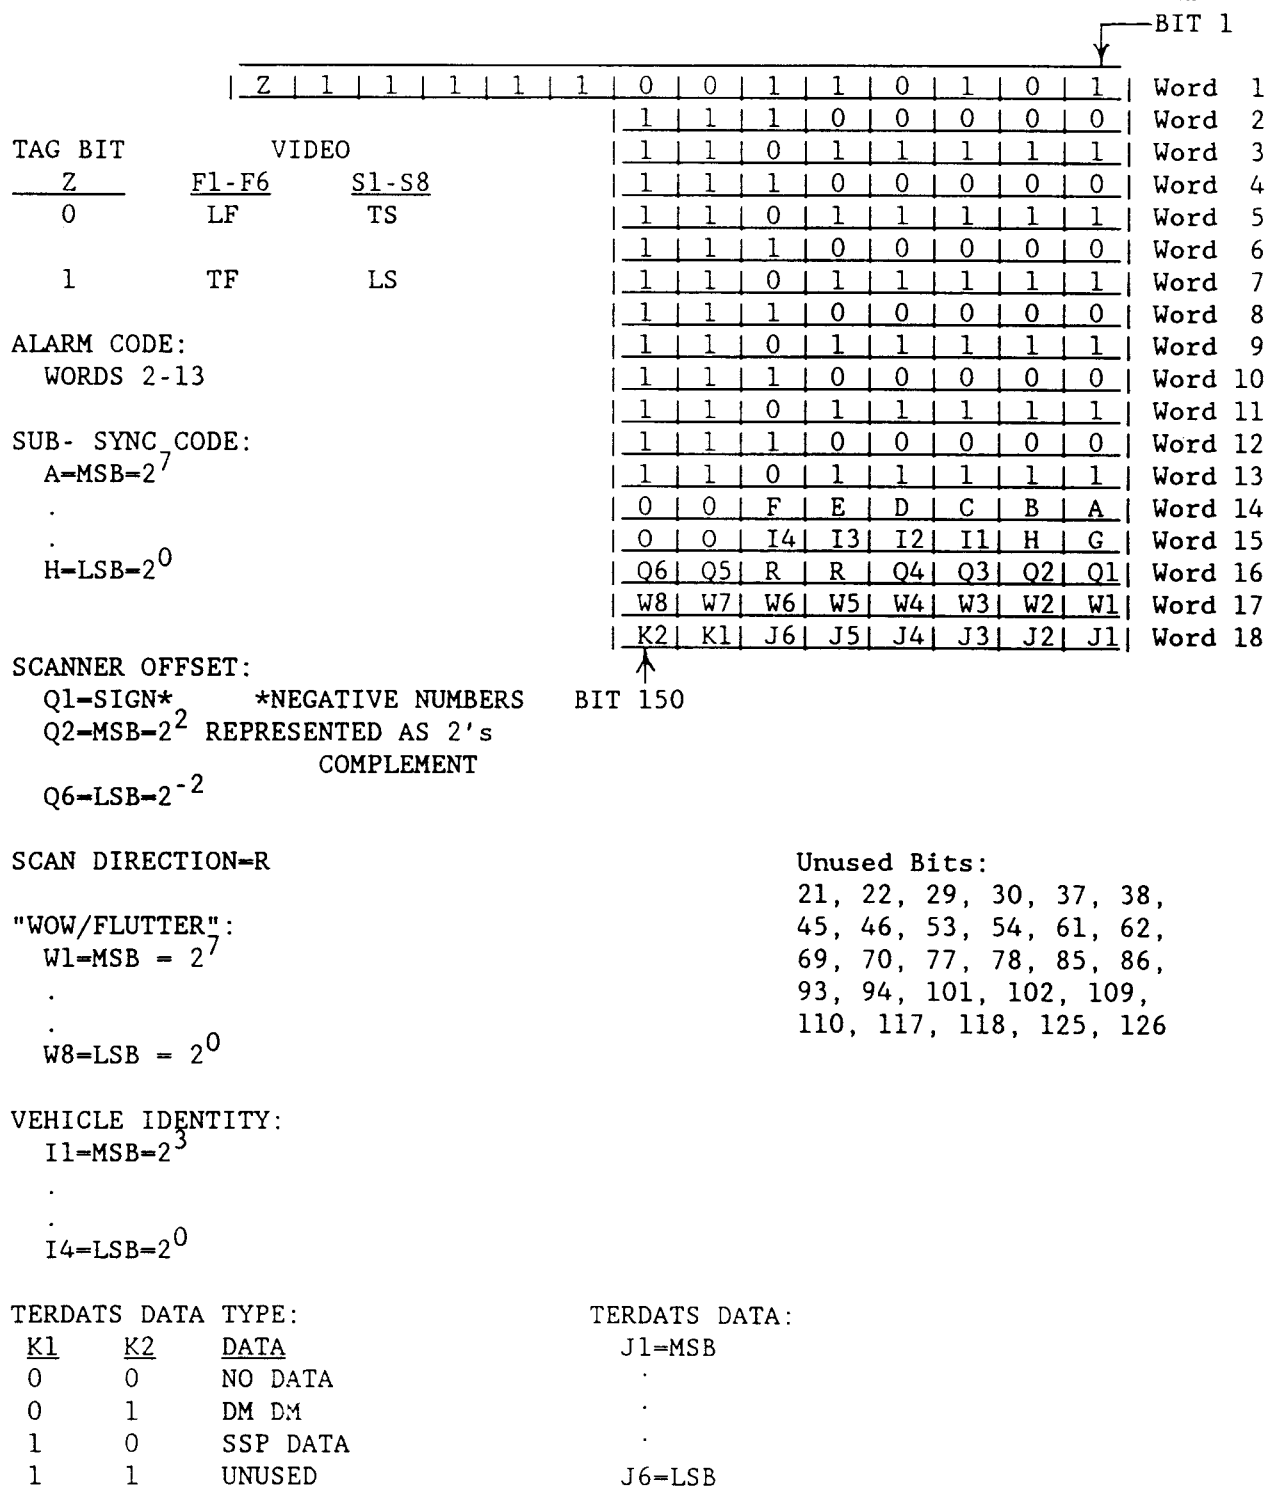The encoder mode is indicated in the OLS equipment status telemetry.

r /2564M

BIT 1

Z	1	1	1	1	1	1	0	0	1	1	0	1	0	1	Word 1
							0	0	0	0	0	0	0	0	Word 2
							0	0	0	0	0	0	0	0	Word 3
							0	0	0	0	0	0	0	0	Word 4
							1	0	0	0	0	0	0	0	Word 5
							1	1	0	0	0	0	0	0	Word 6
							0	0	0	0	0	0	0	0	Word 7
							0	0	0	0	0	0	0	0	Word 8
							0	0	0	0	0	0	0	0	Word 9
							1	0	0	0	0	0	0	0	Word 10
							1	1	0	0	0	0	0	0	Word 11
							0	0	0	0	0	0	0	0	Word 12
							0	0	0	0	0	0	0	0	Word 13
							0	0	0	0	0	0	0	0	Word 14
							1	0	0	0	0	0	0	0	Word 15
							1	1	0	0	0	0	0	0	Word 16
							W8	W7	W6	W5	W4	W3	W2	W1	Word 17
							K2	K1	J6	J5	J4	J3	J2	J1	Word 18

BIT 150

TAG BIT   VIDEO

Z	F1-F6	S1-S8
0	LF	TS
1	TF	LS

BLANK CODE:
  WORDS 2-16=0's EXCEPT
  Transition Bits and Bits
  46, 86, & 126 = 1's

"WOW/FLUTTER":
  W1=MSB = 2^7
  .
  .
  W8=LSB = 2^0

TERDATS DATA TYPE:

K1	K2	DATA
0	0	NO DATA
0	1	DM DM
1	0	SSP DATA
1	1	UNUSED

TERDATS DATA:
 J1=MSB
 .
 .
 J6=LSB

TERDATS DATA TYPE   TERDATS DATA:

K1	K2	DATA
0	0	NO DATA
0	1	DM DM
1	0	SSP DATA
1	1	UNUSED

 J1=MSB
 .
 .
 .
 J6=LSB

FIGURE 27:   RTD BLANK FRAME

r/2564M

BIT 1

```
            | Z | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 | 1 | 1 | 0 | 1 | 0 | 1 |  Word  1
                                        | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |  Word  2
TAG BIT         VIDEO                   | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |  Word  3
   Z        F1-F6    S1-S8              | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |  Word  4
   0         LF       TS                | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |  Word  5
                                        | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |  Word  6
   1         TF       LS                | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |  Word  7
                                        | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |  Word  8
ALARM CODE:                             | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |  Word  9
  WORDS 2-13                            | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |  Word 10
                                        | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |  Word 11
SUB- SYNC CODE:                         | 1 | 1 | 1 | 0 | 0 | 0 | 0 | 0 |  Word 12
  A=MSB=2^7                             | 1 | 1 | 0 | 1 | 1 | 1 | 1 | 1 |  Word 13
    .                                   | 0 | 0 | F | E | D | C | B | A |  Word 14
    .                                   | 0 | 0 | I4| I3| I2| I1| H | G |  Word 15
  H=LSB=2^0                             | Q6| Q5| R | R | Q4| Q3| Q2| Q1|  Word 16
                                        | W8| W7| W6| W5| W4| W3| W2| W1|  Word 17
                                        | K2| K1| J6| J5| J4| J3| J2| J1|  Word 18
```

SCANNER OFFSET: BIT 150
  Q1=SIGN*   *NEGATIVE NUMBERS
  Q2=MSB=2^2 REPRESENTED AS 2's
                    COMPLEMENT
  Q6=LSB=2^{-2}

SCAN DIRECTION=R

"WOW/FLUTTER":   Unused Bits:
  W1=MSB = 2^7 21, 22, 29, 30, 37, 38,
    .   45, 46, 53, 54, 61, 62,
    .   69, 70, 77, 78, 85, 86,
  W8=LSB = 2^0 93, 94, 101, 102, 109,
                                        110, 117, 118, 125, 126

VEHICLE IDENTITY:
  I1=MSB=2^3
    .
    .
  I4=LSB=2^0

TERDATS DATA TYPE: TERDATS DATA:

| K1 | K2 | DATA | J1=MSB
|----|----|------| .
| 0 | 0 | NO DATA | .
| 0 | 1 | DM DM | .
| 1 | 0 | SSP DATA | J6=LSB
| 1 | 1 | UNUSED |

FIGURE 28: RTD SUB-SYNC FRAME

r /2564 M

4.1.3.5.4   SCANNER DIRECTION

Bits 5 and 6 of word 16 identify the direction of the actual movement of the scanner with respect to the spacecraft Z axis. Note that the data received at the interface is in the actual scanner direction. Both bits are identical and are encoded as follows:

ZERO = actual scanner rotation from the +Z axis towards the -Z axis

ONE = actual scanner rotation from the -Z axis towards the +Z axis

4.1.3.6   WOW/FLUTTER INFORMATION

Word 17 of the RTD frame contains an 8-bit so-called "WOW/FLUTTER" (W/F) code. The W/F code supplies the information required to re-time the occurrence of data samples to conform with actual scanner oscillatory motion. The RTD W/F Frequency is a nominal rate of 6023.53 Hz. When a W/F transition occurs in the OLS, the bit (1-150) of the RTD frame being transmitted is stored. During the next frame a binary number corresponding to that bit is transmitted in the W/F slot of that frame. During any frame where no W/F transition has occurred, the next frame transmitted shall contain the no-transition code of 11110000 (with 1 in the MSB position). The delay from the time when a W/F transition should occur, referenced to the scanner, to when the OLS formats the transition in the frame format is 4-5 microseconds.

4.1.3.7   TERDATS INFORMATION

Word 18 of the RTD frame contains an 8 bit TERDATS (Tertiary Data Stream) word. Bits K1 and K2 identify the type of data contained in J1 - J6 as follows:

r/2564M

K1	K2	Data Type
0	0	No Data
0	1	Direct Mode Data Message (DMDM)
1	0	SSP Data
1	1	Unused

4.1.3.7.1   DIRECT MODE DATA MESSAGE (DMDM)

If there is DMDM information to be transmitted to the ground, that information is inserted only into the J1 - J6 bits of word 18 of the RTD Line Sync Frame as follows:

J	Data
J1 = MSB	1st bit in from the uplinked DMDM
•	•
•	•
•	•
•	•
J6 = LSB	Last bit in from the uplinked DMDM

The DMDM data is encoded as a 6 bit ASCII code shown in Figure 29.

4.1.3.7.2   RTD SPECIAL DATA MESSAGE

A special data message (consisting of data from special meteorological sensors) as transmitted to the ground is inserted into the J1 - J6 bits in the overscan period between the line sync frame and the sub-sync frame including the sub-sync frame and excluding the line sync frame (which has DMDM data).

BIT CODE	CHARACTER		BIT CODE	CHARACTER	
000000	0	@	100000	32	■
000001	1	A	100001	33	!
000010	2	B	100010	34	"
000011	3	C	100011	35	#
000100	4	D	100100	36	$
000101	5	E	100101	37	%
000110	6	F	100110	38	&
000111	7	G	100111	39	' (apos.)
001000	8	H	101000	40	(
001001	9	I	101001	41	)
001010	10	J	101010	42	*
001011	11	K	101011	43	+
001100	12	L	101100	44	, (comma)
001101	13	M	101101	45	-
001110	14	N	101110	46	.
001111	15	O	101111	47	/
010000	16	P	110000	48	0
010001	17	Q	110001	49	1
010010	18	R	110010	50	2
010011	19	S	110011	51	3
010100	20	T	110100	52	4
010101	21	U	110101	53	5
010110	22	V	110110	54	6
010111	23	W	110111	55	7
011000	24	X	111000	56	8
011001	25	Y	111001	57	9
011010	26	Z	111010	58	:
011011	27	[	111011	59	;
011100	28	\	111100	60	<
011101	29	]	111101	61	=
011110	30	↑	111110	62	>
011111	31	←	111111	63	?

Note: The left most bit in the bit code is the MSB, which is
J1 if K1K2 = 01.

FIGURE 29 :   SIX UNIT ASCII CODE

Change B
15 Jan 77

4.1.3.7.3   SPECIAL DATA

A group of special data words comprises a special data
message (see Figure 30). A typical message as received consists of
a sync code followed by the time code followed by the data format
section followed by the data. The data is formatted in contiguous
blocks of sensor data. Note that the first bit after the format
section (the right most bit of Figure 30) is complemented and every
second bit will be complemented until the beginning of the next block.
Each block could contain data from a separate special sensor.
Note that the RTD special data will contain the special data in the OLS
LS data line format followed by the special data in the TS data line
format to the limits of the RTD overscan frames. The SSP data message
is reconstructed by storing as received the J1 to J6 bits of each SSP
identified TERDATS word. The message is interrogated in the same
direction as received for the Sync Code, Time Code, Format Section,
and SSP data. The first SSP data bit following the Format Section
is the LSB of the first word of the first sensor identified in the
Format Section. The bits following the SSP data bits of the recon-
structed SSP message are filler bits. The Time Code will change for
each new interrogation cycle and the value will differ by 1 ± 0.005
seconds between adjacent SSP records. The format section will refer
to all formatted SSP data (up to the guaranteed data capacity). The
guaranteed data capacity and maximum data capacity, each including
288 bits of overhead, are as shown in the following table.

Data Capacity (bits per record)

OLS	Guaranteed	Maximum
7-16	5220	6048

r/2564M

1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1
1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1
1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1
1	0	1	0	1	1	1	0	0	0	1	0	1	1	1	1

SYNC CODE

$T1 = MSB = 2^{16}$ sec

T12	T13	T14	T15	T16	T17	T18	T19	T20	T21	T22	T23	T24	T25	T26	T27
0	0	0	0	0	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11

TIME CODE

F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12	F13	F14	F15	F16

FIRST SENSOR REFERENCED

PARITY BIT NOT USED IN PROCESSING

DESIGNATION FOR LOCATION OF SENSOR DATA (F12)
0 = IN LS LINE
1 = IN TS LINE

F2

F11 F12 F13

F16

12 SENSOR FORMAT WORDS

P	# of 36 BIT WORDS PER SENSOR	LSB / LSB	LS/TS	SENSOR I.D. LSB

"FORMAT KEY"

F1	F2	F3	F4	F5	F6	F7	F8	F9	F10	F11	F12	F13	F14	F15	F16
D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$

1st BIT OLS RECEIVED FROM 1st SENSOR

001

NOTE THAT EVERY OTHER SSP DATA BIT IS COMPLEMENTED

LSB OF FIRST WORD OF FIRST SENSOR

MSB OF LAST WORD OF LAST SENSOR

SPECIAL SENSOR DATA REFERENCED BY FORMAT WORDS

D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$	D	$\overline{D}$
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	0
0	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
0	1	0	1	0	1	0	1	0	1	0	0	0	1	0	1

LSB OF 1ST FILLER WORD

BITS NOT REFERENCED BY SENSOR FORMAT WORDS

TIME SCALE AT INTERFACE

Note that every other bit complemented
LAST BIT RECEIVED AT INTERFACE

FIGURE 30: SSP MESSAGE FORMAT

DATE: 08 August 1983

1. ORIGINATOR NAME: AND ADDRESS Westinghouse Electric Corp. P. O. Box 746 - MS 450 Baltimore, MD 21203	2. __ |__| PROPOSED | X | APPROVED	3. CODE IDENT. 97942	4. SPEC. NO. IS-YD-821B
		5. CODE IDENT. 97942	6. SCN NO. 004
7. SYSTEM DESIGNATOR DMSP	8. RELATED ECP NO. 009	9. CONTRACT NO. F04701-83-C-0048	10. CONTRACTUAL AUTHORITY P00004
11. CONFIGURATION ITEM NOMENCLATURE Operational Linescan System		12. EFFECTIVITY OLS-13 thru 16, S/N 5008 thru 5011	

This notice informs recipients that the specification identified by the number (and revision letter) shown in Block 4 has been changed. The pages changed by this SCN being those furnished herewith and carrying the same date as this SCN. The pages of the page numbers and dates listed below in the summary of changed pages, combined with non-listed pages of the orignial issue of the revision shown in Block 4, constitute the current version of this specification.

13. SCN NO.	14. PAGES CHANGED (INDICATE DELETIONS)	* S	* A	15. DATE
004	vii viii 31 62	x x x x		06 AUG 85

	SUMMARY OF CHANGED PAGES			
001 and 005	Pages vii and viii dated 8 AUG 83 and transmitted herewith contain page numbers and dates of all pages of this specification that have been changed by approved SCNs and show the paragraphs affected by each SCN. The SCN approval dates are also shown. The date of approval is the earliest date of approval in instances where more than one contract is affected.			

16. TECHNICAL CONCURRENCE   DATE

M. J. Spangler, Mgr. DMSP-Block 5 Programs

DD FORM 1696
1 DEC 68

* "S" indicates supersedes earlier page.
"A" indicates added page.

e/0161C

SPECIFICATION CHANGE NOTICE
(See MIL-STD-490 For Instructions)

DATE: 15 April 1987

ORIGINATOR NAME: AND ADDRESS	2.		3. CODE IDENT.	4. SPEC. NO.
Westinghouse Electric Corp.		PROPOSED		IS-YD-821B
P. O. Box 746 - MS 450			97942	
Baltimore, MD 21203		X	APPROVED	5. CODE IDENT. 97942	6. SCN NO. 006

7. SYSTEM DESIGNATOR	8. RELATED ECP NO.	9. CONTRACT NO.	10. CONTRACTUAL AUTHORITY
DMSP	0027	F04701-83-C-0048	P00024

11. CONFIGURATION ITEM NOMENCLATURE	12. EFFECTIVITY
Operational Linescan System	OLS 7, S/N 5002 and up

This notice informs recipients that the specification identified by the number (and revision
letter) shown in Block 4 has been changed. The page numbers listed below in the summary of
changed pages, combined with non-listed pages of the orignial issue of the revision shown in
Block 4, constitute the current version of this specification.

13. SCN NO.	14. PAGES CHANGED (INDICATE DELETIONS)	*S	*A	15. DATE (Approved)
006	vii	x		8 MAR 88
	viii	x		
	24	x		
	25	x		
	26	x		
	43	x		
	44	x		
	45	x		

	SUMMARY OF CHANGED PAGES			
001	Pages vii and viii dated 15 APR 87 and trans-			
002	mitted herewith contain page numbers and dates			
004	of all pages of this specification that have			
005	been changed by SCNs and show the paragraphs			
006	affected by each SCN. The SCN approval dates are			
	also shown. The date of approval is the earliest			
	date of approval in instances where more than			
	one contract is affected.			

16. TECHNICAL CONCURRENCE	DATE
USAF/AFSC	March 8, 1988

DD   1696
  FORM
  1 DEC 68

* "S" indicates supersedes earlier page.
  "A" indicates added page.

gp/0052R

SPECIFICATION CHANGE NOTICE
(See MIL-STD-490 For Instructions)

DATE: 1 April 1987

ORIGINATOR NAME: AND ADDRESS	2.	3. CODE IDENT.	4. SPEC. NO.
Westinghouse Electric Corp. P. O. Box 746 - MS 450 Baltimore, MD 21203	☐ PROPOSED ☒ APPROVED	97942	IS-YD-8218
		5. CODE IDENT. 97942	6. SCN NO. 002

7. SYSTEM DESIGNATOR DMSP	8. RELATED ECP NO. 0026	9. CONTRACT NO. F04701-83-C-0048	10. CONTRACTUAL AUTHORITY P00024

11. CONFIGURATION ITEM NOMENCLATURE Operational Linescan System	12. EFFECTIVITY OLS 7, S/N 5002 and up

This notice informs recipients that the specification identified by the number (and revision letter) shown in Block 4 has been changed. The page numbers listed below in the summary of changed pages, combined with non-listed pages of the original issue of the revision shown in Block 4, constitute the current version of this specification.

13. SCN NO.	14. PAGES CHANGED (INDICATE DELETIONS)	* S	* A	15. DATE (Approved)
002	i	x		08 MAR 88
	iii	x		
	v	x		
	vii	x		
	viii	x		
	2	x		
	3	x		
	9	x		
	10	x		
	15	x		
	18	x		
	20	x		
	36	x		
	38	x		

	SUMMARY OF CHANGED PAGES			
001 002 004 005	Pages vii and viii dated 01 APR 87 and trans- mitted herewith contain page numbers and dates of all pages of this specification that have been changed by SCNs and show the paragraphs affected by each SCN. The SCN approval dates are also shown. The date of approval is the earliest date of approval in instances where more than one contract is affected.			

16. TECHNICAL CONCURRENCE   DATE

USAF/AFSC   March 8, 1988

DD FORM 1696
1 DEC 68

* "S" indicates supersedes earlier page.
"A" indicates added page.

gp/0403C

1. ORIGINATOR NAME AND ADDRESS	2.	3. CODE IDENT.	4. SPEC. NO.
WESTINGHOUSE ELECTRIC CORP. Aerospace Division P.O. Box 746-MS 450 Baltimore, Maryland 21203	[ ] PROPOSED [X] APPROVED	97942	IS-YD-821B
		5. CODE IDENT. 97942	6. SCN. NO. 001

7. SYSTEM DESIGNATOR	8. RELATED ECP NO. 004	9. CONTRACT NO. F04701-77-C-0031	10. CONTRACTUAL ACTIVITY P00034
DMSP			

11. CONFIGURATION ITEM NOMENCLATURE	12. EFFECTIVITY
Operational Linescan System	5002 and Up

This notice informs recipients that the specification identified by the number (and revision letter) shown in Block 4 has been changed. The pages changed by this SCN being those furnished herewith and carrying the same date as this SCN. The pages of the page numbers and dates listed below in the summary of changed pages, combined with non-listed pages of the original issue of the revision shown in Block 4, constitute the current version of this specification.

13. SCN NO.	14. PAGES CHANGED (INDICATE DELETIONS)	* S	* A	15. DATE
001	vii, 5, 14, 16, 21, 22, 23, 24, 31, 32, 33, 35, 36, 39, 40, 42, 43, 46, 51, 54, 55, 56, 58, 59, 62, 63	X		5 NOV 1980
001	14a, 33a, 40a, 51a		X	5 NOV 1980

TECHNICAL CONCURRENCE	DATE
M. J. Spangler, Mgr. Block 5 Programs	3-29-82

FORM 1696
1 DEC

* "S" indicates supersedes earlier page.
"A" indicates added page.

Westinghouse   Electronic Systems Group
Electric Corporation

9 December 1991

Letter No. 118-461

HQ USAF Space Systems Division
P. O. Box 92960
Worldway Postal Center
Los Angeles, CA 90009-2960

Attention: MWSIC/DMO

Subject: Contract F04701-88-C-0118, CDRL 015A2
              Specification Maintenance Document (Hardware)
              Approved SCN 011 to IS-YD-821B Data Specification

Reference: P00020 of the Subject Contract
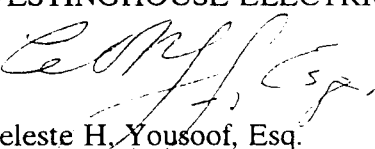
Enclosure: Seven (7) copies of Subject CDRL

Gentlemen:

In accordance with the terms of the subject contract, enclosed herewith are seven (7) copies of
CDRL 015A2 Specification Maintenance Document - Approved SCN 011 to the IS-YD-821B Data
Specification for your review and retention.

Very truly yours,

WESTINGHOUSE ELECTRIC CORPORATION

Celeste H. Yousoof, Esq.
Contracts Representative

cc: DPRO
         PKWJ
         Harris
         GE/ASD
         1000 SOG/LKX

AMENDMENT OF SOLICITATION/MODIFICATION OF CONTRACT

					PAGE 1 OF 4
PROC INSTRUMENT ID NO. (PIIN) F04701-88-C-0118	3. SPIIN P00020	4. EFFECTIVE DATE 91 NOV 05	5. REQUISITION/PURCHASE REQUEST PROJECT NO.		6. DOC/DMS RATING

7. ISSUED BY CODE FO7610

USAF/AFSC
HQ SPACE SYSTEMS DIVISION
PO BOX 92960
LOS ANGELES, CA 90009-2960

BUYER: CAPT GARY O'GUIN/PKW
(213) 336-5113

8. ADMINISTERED BY (IF OTHER THAN BLOCK 7) CODE S2103A

DPRO, WESTINGHOUSE ELECTRIC CORP.
P.O. BOX 1693
BALTIMORE, MD 21203-1693

'91 NOV 05

9. CONTRACTOR NAME AND ADDRESS CODE 97942

WESTINGHOUSE ELECTRIC CORPORATION
P. O. BOX 8703
BALTIMORE-WASHINGTON INT'L AIRPORT
BALTIMORE, MD 21240

Rec'd 11/12/91
Spangler
Barrett
Sept 13
Lepp
Wernet
Lieske
Einsel

10. SECURITY CLAS U

11. DISCOUNT FOR PROMPT PAYMENT

12. PURCHASE OFFICE POINT OF CONTACT STD/S14/SCH

13. THIS BLOCK APPLIES ONLY TO AMENDMENTS OF SOLICITATIONS

☐ The above numbered solicitation is amended as set forth in block 17.

14. THIS BLOCK APPLIES ONLY TO MODIFICATIONS OF CONTRACTS

☐ THIS CHANGE IS ISSUED PURSUANT TO _____ THE CHANGES SET FORTH HEREIN ARE MADE TO THE ABOVE NUMBERED CONTRACT/ORDER.

☐ THE ABOVE NUMBERED CONTRACT IS MODIFIED TO REFLECT THE ADMINISTRATIVE CHANGES (SUCH AS CHANGES IN PAYING OFFICE, APPROPRIATION DATA, ETC.) SET FORTH HEREIN.

☒ THIS SUPPLEMENTAL AGREEMENT IS ENTERED INTO PURSUANT TO AUTHORITY OF "CHANGES CLAUSE" IT MODIFIES THE ABOVE NUMBERED CONTRACT AS SET FORTH HEREIN.

☐ THIS MODIFICATION IS ISSUED PURSUANT TO

15. CONTRACT ADMINISTRATION DATA

A. AIMD OF MOD: C

D. CHANGE IN CONTRACT AMOUNT INCREASE (+) DECREASE (-): $420,000.00+

16. ENTER ANY APPLICABLE CHANGES

U

17. REMARKS (Except as provided herein, all terms and conditions of the contract, as heretofore changed, remain unchanged and in full force and effect.)

SEE ATTACHED PAGES.

18.

☐ CONTRACTOR/OFFEROR IS NOT REQUIRED TO SIGN THIS DOCUMENT

☒ CONTRACTOR/OFFEROR IS REQUIRED TO SIGN THIS DOCUMENT AND RETURN ORIG COPIES TO ISSUING OFFICE

CONTRACTOR/OFFEROR (Signature of person authorized to sign)

27. UNITED STATES OF AMERICA (Signature of Contracting Officer)

19. NAME AND TITLE OF SIGNER (Type or print)
G. ELKSNIS
MANAGER, CONTRACTS
AFSC SPACE DIVISION

21. DATE SIGNED 9-25-91

23. NAME OF CONTRACTING OFFICER (Type or print)
ALMA J. PALMER

24. DATE SIGNED 91 SEP 26

PREVIOUS EDITION WILL BE USED.

AFSC—Andrews AFB DC 1984

(c) The descriptive data for Item 0008 is revised by increasing the target cost, target profit and target price therein by $11,039.00, $857.00 and $11,896.00, respectively.

(d) The descriptive data for Item 0009 is revised by increasing the target cost, target profit and target price therein by $11,576.00, $899.00 and $12,475.00, respectively.

(e) The descriptive data for Item 0010 is revised by increasing the target cost, target profit and target price therein by $11,951.00, $928.00 and $12,879.00, respectively.

(2) SECTION B(2) of said PART I is revised as follows:

(a) The total target cost in subparagraph a. is increased by $389,665.00.

(b) The total target profit in subparagraph b. is increased by $30,335.00.

(c) The total target price in subparagraph c. is increased by $420,000.00.

(d) The ceiling price in subparagraph d. is increased by $467,598.00.

(3) SECTION G(1) of said PART I is changed as shown below:

69G - PART I, SECTION G OF THE SCHEDULE

ACRN	Acct Class data	Appropriation/Lmt Subhead/CPN Recip DODAAD Supplemental Accounting Classification	Obligation Amount
AC	ACCOUNT CHANGE UNCLASSIFIED		$ 420,000.00+

pr/mipr data:
  FY7616901096

descriptive data: 5703020   F94200
                    150 4730 230MSP 004030 00000 35160F 594200
PR is partial. Total obligation for this ACRN is
$19,228,706.00.